



DESCRIPTION

The 2SC4672 is available in SOT-89 package

FEATURES

- Available in SOT-89 package


ORDERING INFORMATION

Package Type	Part Number
SOT-89	2SC4672Q
	2SC4672R
Note	SPQ: 1,000pcs/Reel
AiT provides all RoHS Compliant Products	

APPLICATIONS

- Can be used for switching and amplifying in various electrical and electronic circuit.

PIN DESCRIPTION

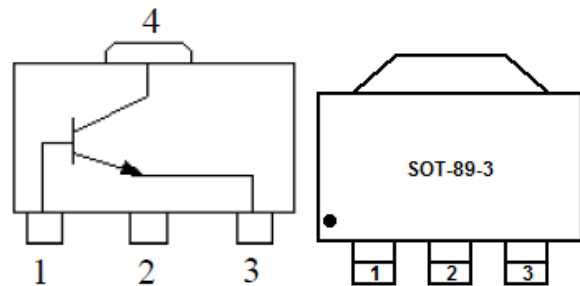



ABSOLUTE MAXIMUM RATINGS

V _{CEO} , Collector-Emitter Voltage(I _B =0)	25V
V _{CBO} , Collector-Base Voltage(I _E =0)	40V
V _{EBO} , Emitter-Base Voltage(I _C =0)	6V
I _C , Collector Current	1.5A
P _{TOT} , Total Device Dissipation(T _A =25°C) ^{NOTE1}	1W
T _{JM} , Junction Temperature(Max)	150°C
T _{STG} , Storage Temperature	-55°C ~150°C

Stresses above may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated in the Electrical Characteristics are not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

NOTE1: Device is mounted on a printed circuit board.

ELECTRICAL CHARACTERISTICS

T_A=25°C, unless otherwise specified

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	
Collector-Emitter Breakdown Voltage	V _{(BR)CEO}	I _C = 2mA, I _B =0	25	-	-	V	
Collector-Base Breakdown Voltage	V _{(BR)CBO}	I _C =100μA, I _E =0	40	-	-	V	
Emitter-Base Breakdown Voltage	V _{(BR)EBO}	I _E =100μA, I _C =0	6	-	-	V	
Forward Current Transfer Ratio	h _{FE}	V _{CE} =1V, I _C =100mA	Q	120	-	270	
		R	180	-	390		
Collector-Base Current	I _{CBO}	V _{CB} =35V, I _E =0	-	-	100	nA	
Collector-Emitter Saturation Voltage	V _{CE(sat)}	I _C =800mA, I _B =80mA	-	-	0.5	V	
Characteristic Frequency	f _T	I _C =50mA, V _{CE} =10V, f=100MHz	-	100	-	MHz	



ELECTRICAL CHARACTERISTICS CURVES

Figure 1.

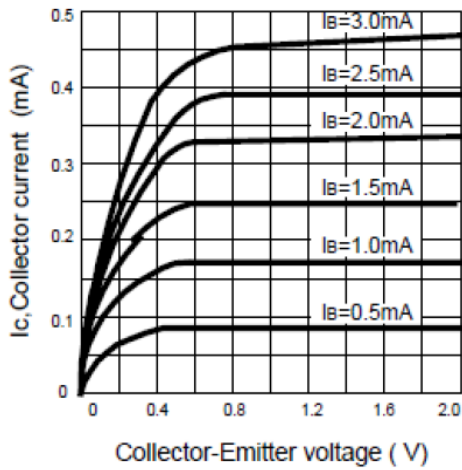


Figure 2.

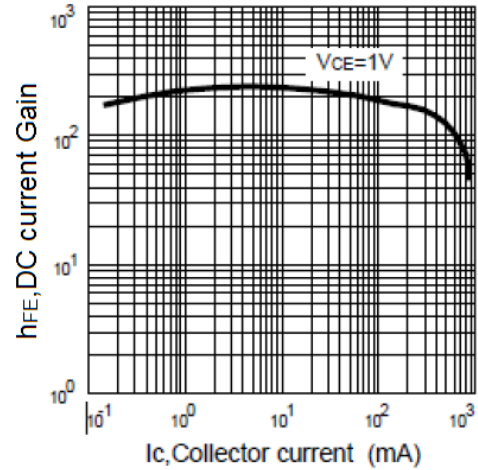


Figure 3.

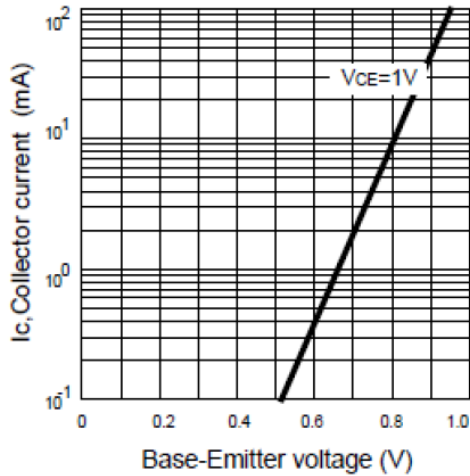


Figure 4.

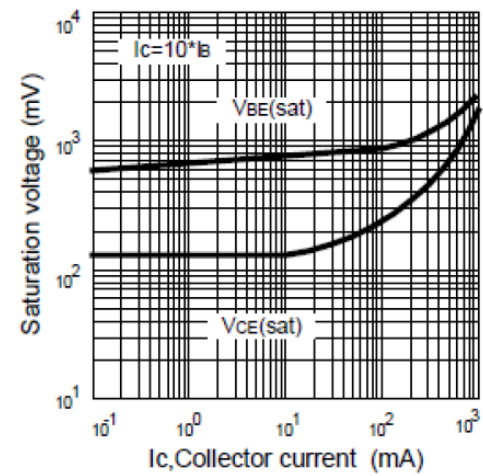


Figure 5.


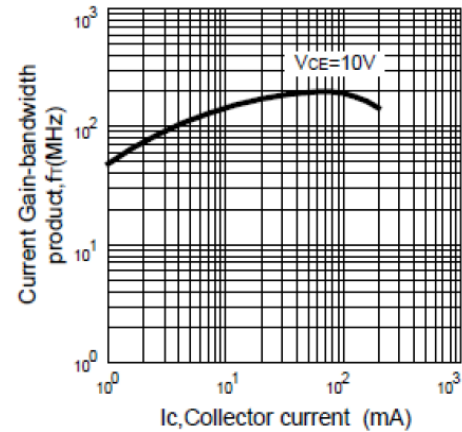



Figure 6.



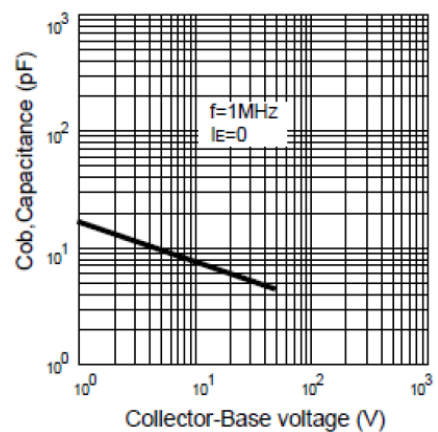

PACKAGE INFORMATION

Dimension in SOT-89 (Unit: mm)

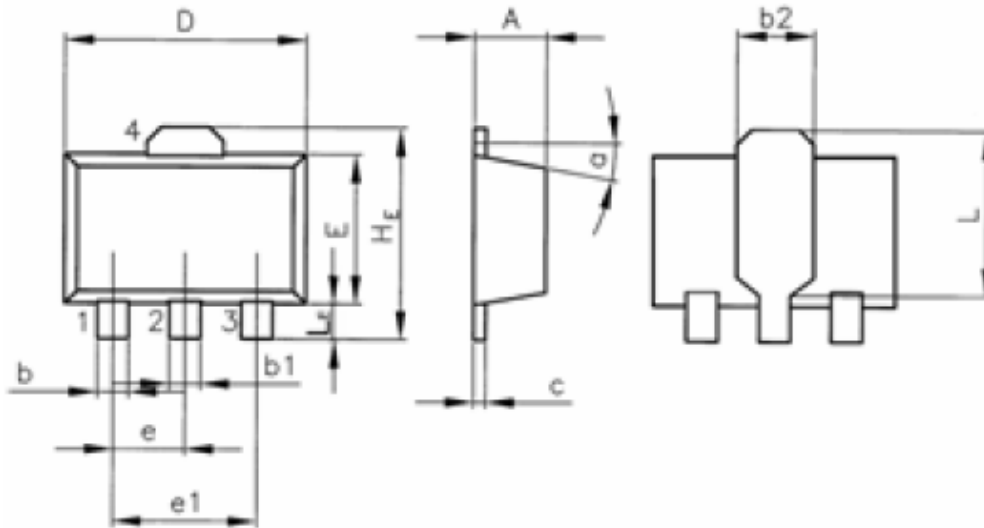

Symbol	Min	Typ	Max
A	1.4	-	1.6
b	0.35	-	0.55
b1	0.4	-	0.65
b2	-	1.6	-
c	0.35	-	0.45
D	4.4	-	4.6
E	2.35	-	2.55
e	-	1.5	-
e1	-	3	-
HE	-	4.15	-
L	-	2.7	-
LE	-	1.0	-
α	-	5°	-



IMPORTANT NOTICE

AiT Semiconductor Inc. (AiT) reserves the right to make changes to any its product, specifications, to discontinue any integrated circuit product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

AiT Semiconductor Inc.'s integrated circuit products are not designed, intended, authorized, or warranted to be suitable for use in life support applications, devices or systems or other critical applications. Use of AiT products in such applications is understood to be fully at the risk of the customer. As used herein may involve potential risks of death, personal injury, or severe property, or environmental damage. In order to minimize risks associated with the customer's applications, the customer should provide adequate design and operating safeguards.

AiT Semiconductor Inc. assumes to no liability to customer product design or application support. AiT warrants the performance of its products of the specifications applicable at the time of sale.