



DESCRIPTION

The AO321B brings performance and economy to low power systems. With a high unity gain frequency and a guaranteed 0.4V/ μ s slew rate, the quiescent current is only 430 μ A/amplifier (5V). The input common mode range includes ground and therefore the device is able to operate in single supply applications as well as in dual supply applications. It is also capable of comfortably driving large capacitive loads.

Overall the AO321B is a low power, wide supply range performance op amp that can be designed into a wide range of applications at an economical price without sacrificing valuable board space.

The AO321B single is available in SOT-25 package.

ORDERING INFORMATION

Package Type	Part Number	
SOT-25 SPQ: 3,000pcs/Reel	E5	AO321BE5R
		AO321BE5VR
Note	V: Halogen free Package R: Tape & Reel	
AiT provides all RoHS products		


FEATURES

- Gain-Bandwidth product: 1MHz
- Low supply current: 430 μ A
- Low input bias current: 45nA
- Wide supply voltage range: +3V to +25V
- Available in SOT-25 package

APPLICATION


- Chargers
- Power supplies
- Industrial: controls, instruments
- Desktops
- Communications infrastructure

TYPICAL APPLICATION

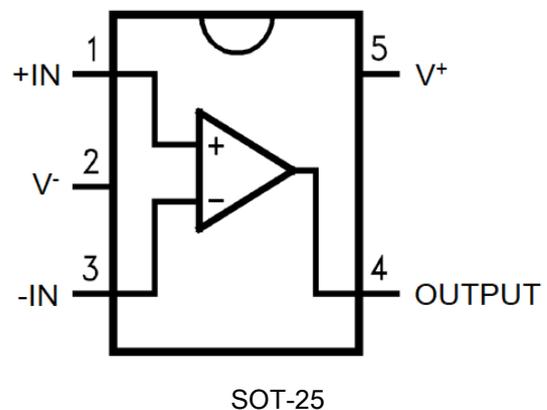



PIN DESCRIPTION

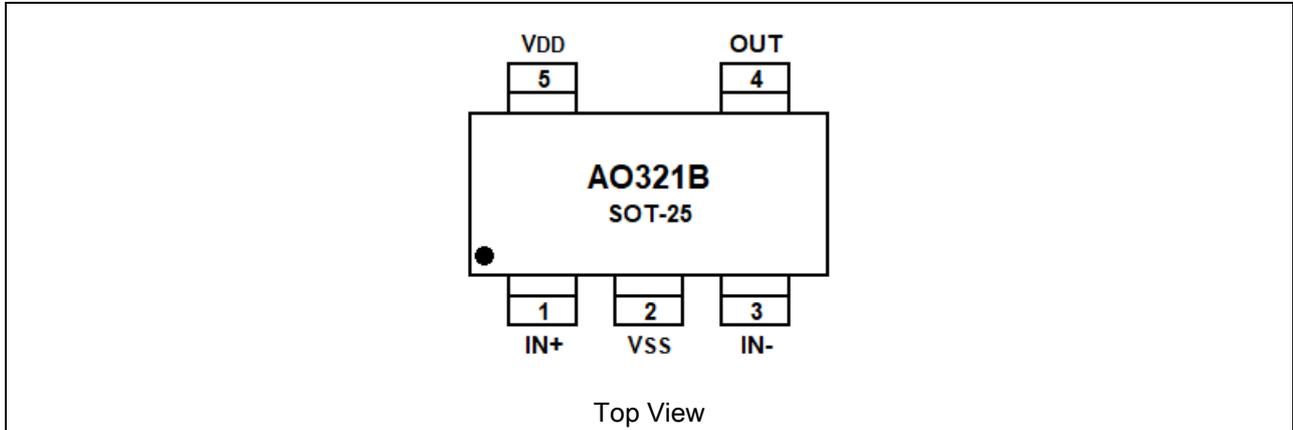

Pin #	Symbol	Function
1	IN+	Analog Positive Input
2	V _{SS}	Ground or Negative Power Supply Input
3	IN-	Analog Inverting Input
4	OUT	Output
5	V _{DD}	Positive Power Supply Input



ABSOLUTE MAXIMUM RATINGS

Supply Voltage, (V ⁺ - V ⁻)	25V
Input Voltage	-0.3 ~ 25V
Output Short Circuit to GND V ⁺ ≤ 15V and T _A = 25°C ^{NOTE1}	Continuous
Junction Temperature ^{NOTE2}	150°C
θ _{JA} , Thermal Resistance to Ambient	265°C
Operating Temperature Range	-40°C ~ 85°C
Storage Temperature Range	-65°C ~ 150°C

Stress beyond above listed "Absolute Maximum Ratings" may lead permanent damage to the device. These are stress ratings only and operations of the device at these or any other conditions beyond those indicated in the operational sections of the specifications are not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.



ELECTRICAL CHARACTERISTICS

Unless otherwise specified: $V^+=5.0V$

Parameter		Conditions	Min.	Typ.	Max.	Unit
Input Offset Voltage		$T_A=25^\circ C$ NOTE3	-	2	5	mV
Input Bias Current		$T_A=25^\circ C$, $I_{IN}(+)$ or $I_{IN}(-)$, $V_{CM}=0V$ NOTE4	-	45	150	nA
Input Offset Current		$T_A=25^\circ C$, $I_{IN}(+) - I_{IN}(-)$, $V_{CM}=0V$	-	3	30	nA
Input Common-Mode Voltage Range		$T_A=25^\circ C$, $V^+=25V$ NOTE5	0	-	$V^+-1.5$	V
Supply Current		Over Full Temperature Range, $R_L=\infty$ on all Op Amps				mA
		$V^+=25V$	-	0.4	2	
		$V^+=25V$	-	0.33	1.2	
Large Signal Voltage Gain		$V^+=15V$, $T_A=25^\circ C$, $R_L \geq 2k\Omega$ (For $V_o=1\sim 11V$)	80	100	-	V/mV
Common-Mode Rejection Ratio		DC, $T_A=25^\circ C$, $V_{CM}=0\sim V^+-1.5V$	70	90	-	dB
Power Supply Rejection Ratio		DC, $T_A=25^\circ C$, $V^+=5\sim 25V$	70	85	-	dB
Amplifier-to-Amplifier Coupling		$T_A=25^\circ C$, $f=1\sim 20kHz$ (Input Referred)NOTE6	-	-120	-	dB
Output Current	Source	$V_{IN}(+)=1V$, $V_{IN}(-)=0V$, $V^+=15V$, $V_o=2V$, $T_A=25^\circ C$	20	50	-	mA
	Sink	$V_{IN}(-)=1V$, $V_{IN}(+)=0V$, $V^+=15V$, $V_o=2V$, $T_A=25^\circ C$	4	6	-	
			$V_{IN}(-)=1V$, $V_{IN}(+)=0V$, $V^+=15V$, $V_o=200mV$, $T_A=25^\circ C$	8	45	-
Short Circuit to Ground		$V^+=15V$, $T_A=25^\circ C$ NOTE1	-	40	85	mA
Output Voltage Swing	V_{OH}	$V^+=25V$				
		$R_L=2k\Omega$	22	23	-	V
		$R_L=10k\Omega$	22	23.5	-	V
	V_{OL}	$V^+=5V$, $R_L=10k\Omega$	-	-	20	mV

NOTE1: Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is intended to be functional, but specific performance is not guaranteed. For guaranteed specifications and the test conditions, see the Electrical Characteristics.

NOTE2: Short circuits from the output to V^+ can cause excessive heating and eventual destruction. When considering short circuits to ground, the maximum output current is approximately 40mA independent of the magnitude of V^+ . At values of supply voltage in excess of +15V, continuous short-circuits can exceed the power dissipation ratings and cause eventual destruction. Destructive dissipation can result from simultaneous shorts on all amplifiers.

NOTE3: The maximum power dissipation is a function of $T_{J(MAX)}$, θ_{JA} , and T_A . The maximum allowable power dissipation at any ambient temperature is $P_D = (T_{J(MAX)} - T_A) / \theta_{JA}$. All numbers apply for packages soldered directly onto a PC board.

NOTE4: $V_o=1.4V$, $R_s = 0\Omega$ with V^+ from 5V to 25V; and over the full input common-mode range (0V to $V^+ - 1.5V$) at $25^\circ C$

NOTE5: The direction of the input current is out of the IC due to the PNP input stage. This current is essentially constant, independent of the state of the output so no loading change exists on the input lines.

NOTE6: The input common-mode voltage of either input signal voltage should not be allowed to go negative by more than 0.3V (at $25^\circ C$). The upper end of the common-mode voltage range is $V^+ - 1.5V$ (at $25^\circ C$), but either or both inputs can go to +25V without damage, independent of the magnitude of V^+ .


NOTE7: Due to proximity of external components, insure that coupling is not originating via stray capacitance between these external parts. This typically can be detected as this type of capacitance increases at higher frequencies.




TYPICAL PERFORMANCE CHARACTERISTICS

Unless otherwise specified: $V_S=+5V$, single supply, $T_A=25^\circ C$


1. Small Signal Pulse Response

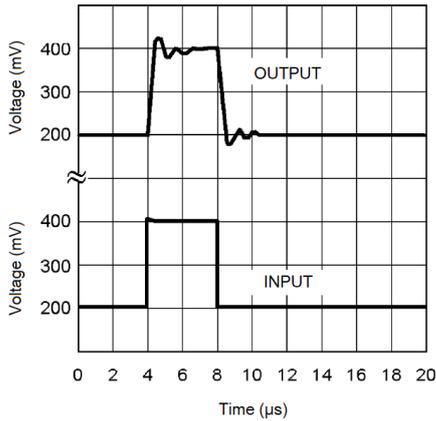


2. Large Signal Pulse Response

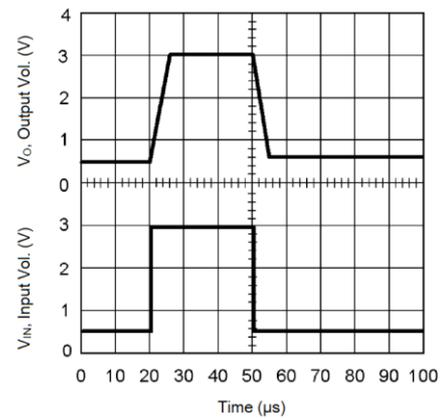


3. Supply Current vs. Supply Voltage

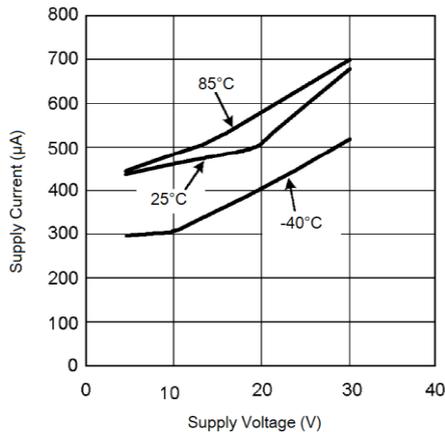


4. Sinking Current vs. Output Voltage

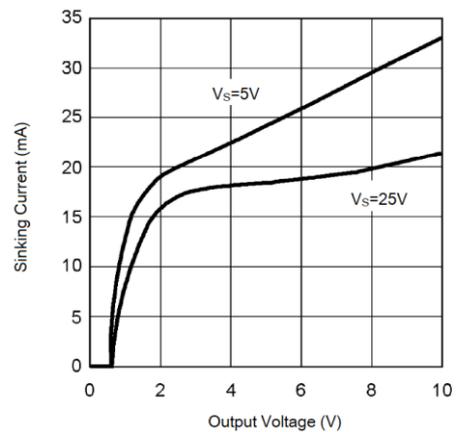

5. Source Current vs. Output Voltage

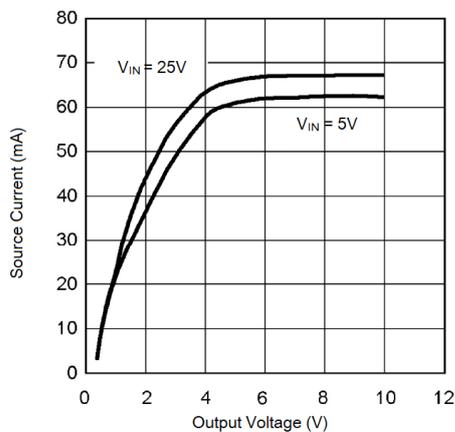


6. Open Loop Frequency Response

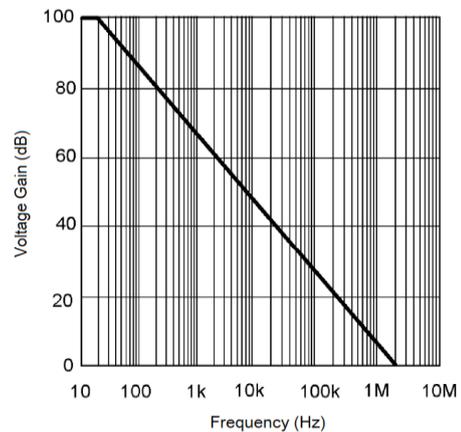




TYPICAL APPLICATIONS

1. Amplitude Modulator Circuit

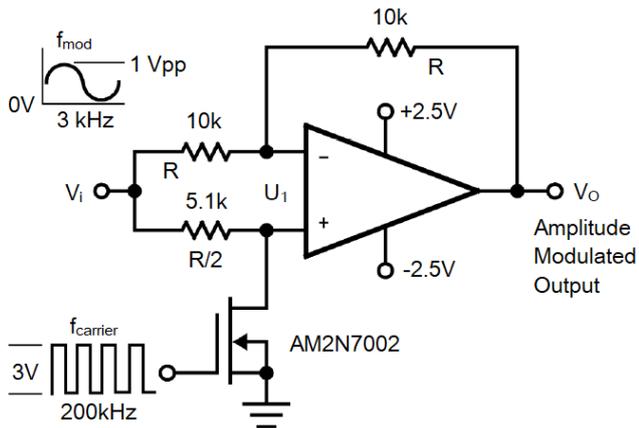


3. Power Amplifier

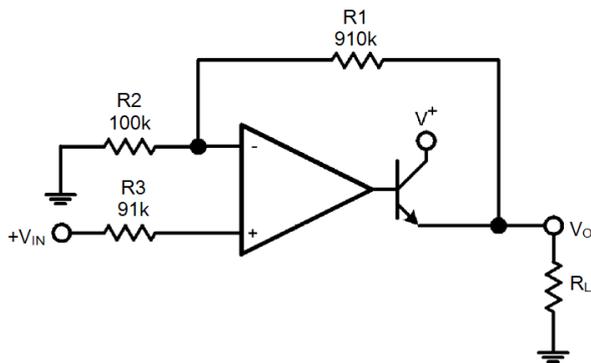


$V_0 = 0 V_{DC}$ for $V_{IN} = 0 V_{DC}$, $A_v = 10$

5. Fixed Current Sources

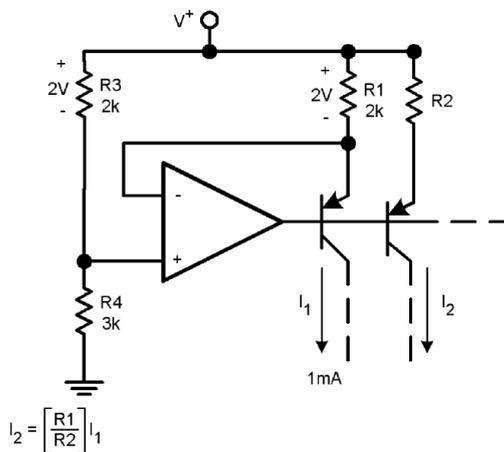


2. DC Summing Amplifier

($V_{IN}'s \geq 0 V_{DC}$ and $V_0 \geq V_{DC}$)

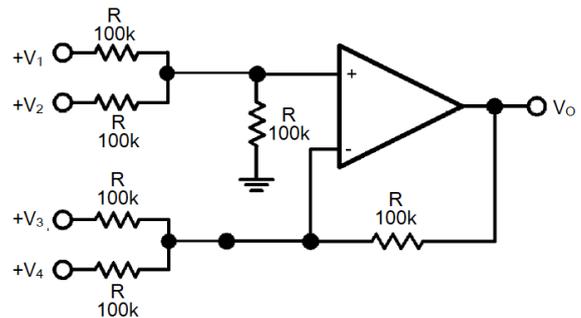


Where: $V_0 = V_1 + V_2 - V_3 - V_4$, $(V_1 + V_2) \geq (V_3 + V_4)$ to Keep $V_0 > 0 V_{DC}$

4. LED Driver

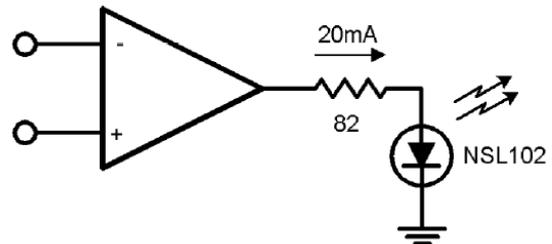

6. Lamp Driver

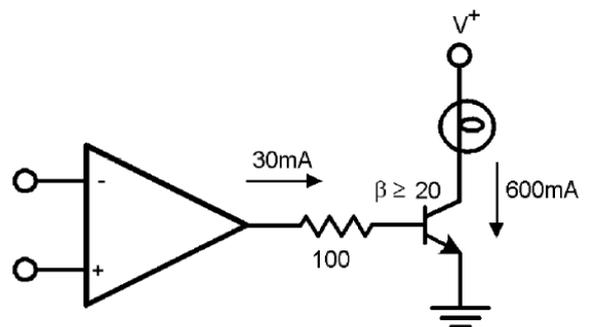



DETAILED INFORMATION

Application Summary

The AO321B op amp can operate with a single or dual power supply voltage, has true-differential inputs, and remain in the linear mode with an input common-mode voltage of 0 V_{DC}. This amplifier operates over a wide range of power supply voltages, with little change in performance characteristics. At 25°C amplifier operation is possible down to a minimum supply voltage of 3V.

Large differential input voltages can be easily accommodated and, as input differential voltage protection diodes are not needed, no large input currents result from large differential input voltages. The differential input voltage may be larger than V⁺ without damaging the device. Protection should be provided to prevent the input voltages from going negative more than -0.3 V_{DC} (at 25°C). An input clamp diode with a resistor to the IC input terminal can be used.

To reduce the power supply drain, the amplifier has a class A output stage for small signal levels which converts to class B in a large signal mode. This allows the amplifiers to both source and sink large output currents. Therefore both NPN and PNP external current boost transistors can be used to extend the power capability of the basic amplifiers. The output voltage needs to raise approximately 1 diode drop above ground to bias the on-chip vertical PNP transistor for output current sinking applications.

For AC applications, where the load is capacitively coupled to the output of the amplifier, a resistor should be used, from the output of the amplifier to ground to increase the class A bias current and to reduce distortion.

Capacitive loads which are applied directly to the output of the amplifier reduce the loop stability margin. Values of 50pF can be accommodated using the worst-case non-inverting unity gain connection. Large closed loop gains or resistive isolation should be used if large load capacitance must be driven by the amplifier.

The bias network of the AO321B establishes a supply current which is independent of the magnitude of the power supply voltage over the range of from 3 V_{DC} to 25 V_{DC}.


Output short circuits either to ground or to the positive power supply should be of short time duration. Units can be destroyed, not as a result of the short circuit current causing metal fusing, but rather due to the large increase in IC chip dissipation which will cause eventual failure due to excessive junction temperatures. The




larger value of output source current which is available at 25°C provides a larger output current capability at elevated temperatures than a standard IC op amp.

The circuits presented in the section on typical applications emphasize operation on only a single power supply voltage. If complementary power supplies are available, all of the standard op amp circuits can be used. In general, introducing a pseudo-ground (a bias voltage reference of $V^+/2$) will allow operation above and below this value in single power supply systems. Many application circuits are shown which take advantage of the wide input common-mode voltage range which includes ground. In most cases, input biasing is not required and input voltages which range to ground can easily be accommodated.

Simplified Schematic

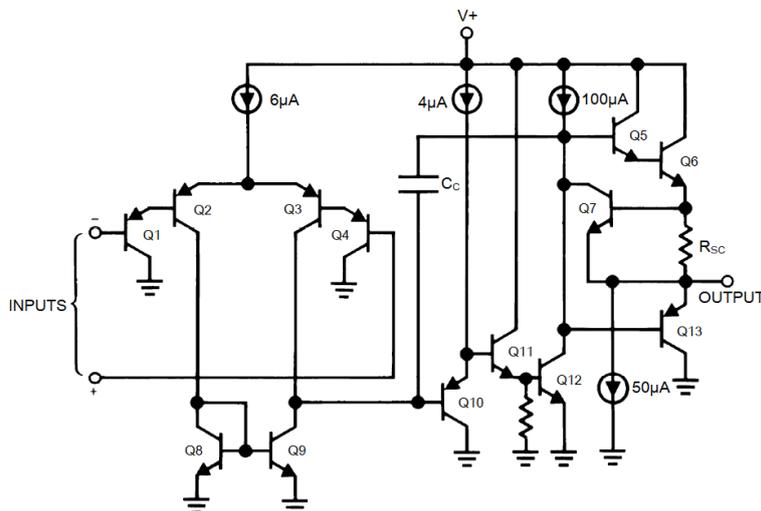

Application Circuit

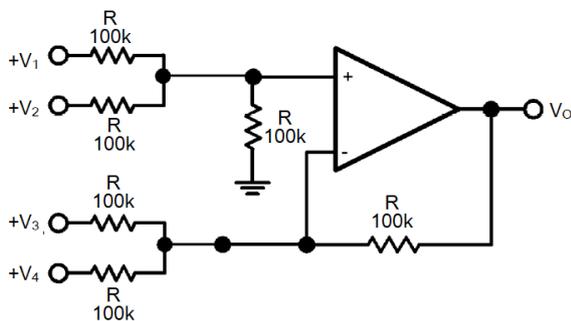


DC Summing Amplifier
($V_{IN's} \geq 0$ V_{DC} and $V_O \geq V_{DC}$)

Where: $V_0 = V_1 + V_2 - V_3 - V_4$, $(V_1 + V_2) \geq (V_3 + V_4)$ to keep $V_0 > 0$ V_{DC}



Non-Inverting DC Gain Schematic (0-V Input = 0-V Output)

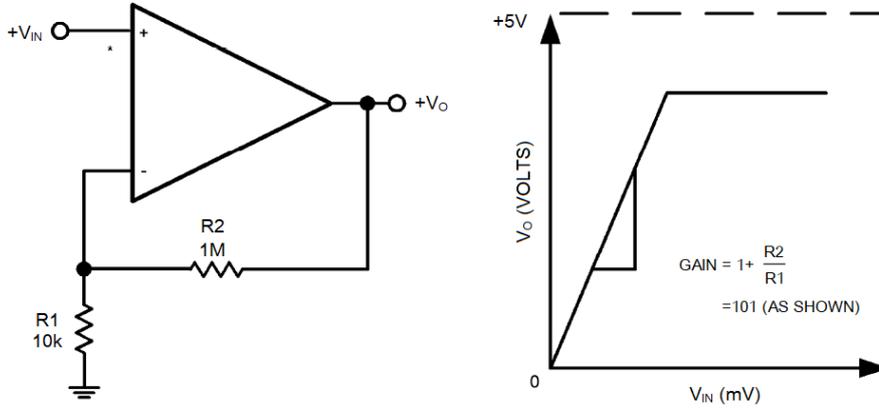


*R NOT NEEDED DUE TO TEMPERATURE INDEPENDENT I_{IN}



PACKAGE INFORMATION

Dimension in SOT-25 (Unit: mm)

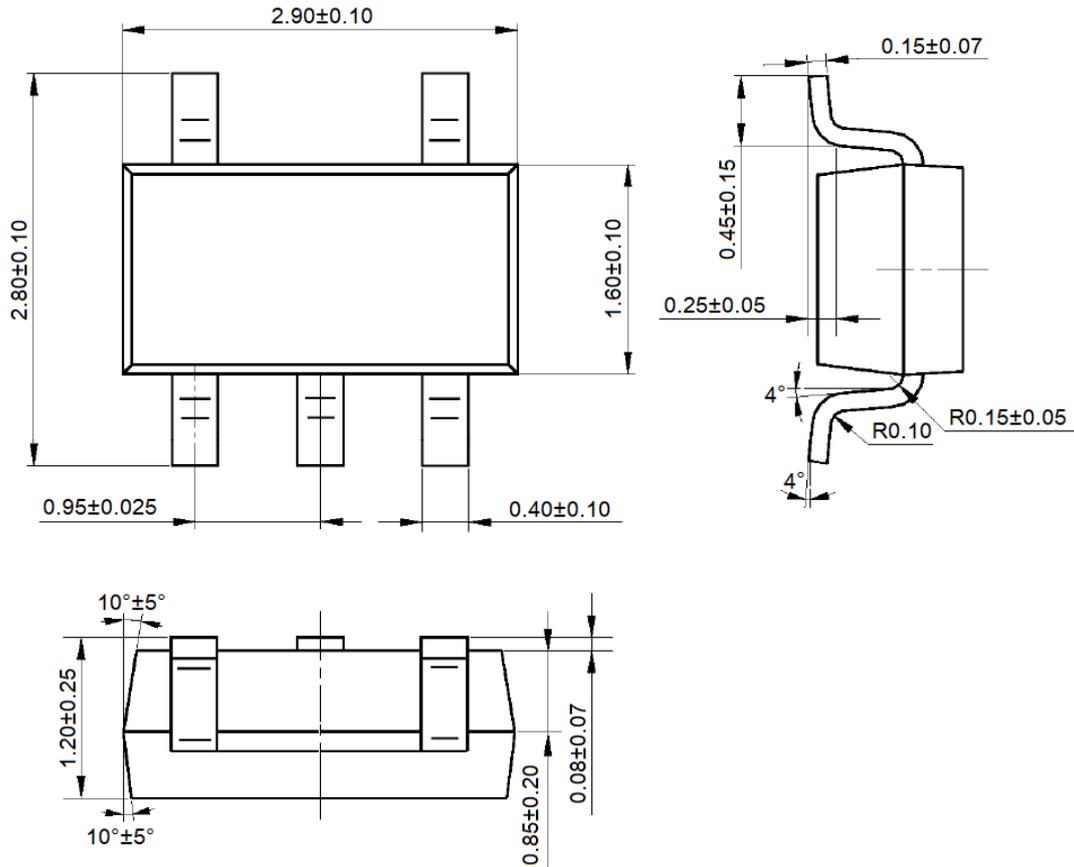



IMPORTANT NOTICE

AiT Semiconductor Inc. (AiT) reserves the right to make changes to any its product, specifications, to discontinue any integrated circuit product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

AiT Semiconductor Inc.'s integrated circuit products are not designed, intended, authorized, or warranted to be suitable for use in life support applications, devices or systems or other critical applications. Use of AiT products in such applications is understood to be fully at the risk of the customer. As used herein may involve potential risks of death, personal injury, or severe property, or environmental damage. In order to minimize risks associated with the customer's applications, the customer should provide adequate design and operating safeguards.

AiT Semiconductor Inc. assumes to no liability to customer product design or application support. AiT warrants the performance of its products of the specifications applicable at the time of sale.