



DESCRIPTION

A6250A series is a group of positive voltage output, low power consumption, low dropout voltage, three terminal regulator. It can provide 250mA output current when input / output voltage differential drops to 430mV ($V_{OUT}=2.8V$). The very low power consumption of A6250A ($I_Q=1.0\mu A$) can greatly improve natural life of batteries.

A6250A can provide output value in the range of 1.1V~5.5V in 0.1V steps. It also can be customized on command.

A6250A includes high accuracy voltage reference, error amplifier, current limit circuit and output driver module.

A6250A has well load transient response and good temperature characteristic, and it uses trimming technique to guarantee output voltage accuracy within $\pm 2\%$.

The A6250A is available in SOT-23, SOT-25 and SOT89-3 packages.

ORDERING INFORMATION

Package Type	Part Number	
SOT-23 SPQ: 3,000pcs/Reel	E3	A6250AE3R-XX
		A6250AE3VR-XX
SOT-25 SPQ: 3,000pcs/Reel	E5	A6250AE5R-XX
		A6250AE5VR-XX
SOT89-3 SPQ: 1,000pcs/Reel	K3	A6250AK3R-XX
		A6250AK3VR-XX
Note	XX: Output Voltage 30=3.0V; 33 = 3.3V V: Halogen free Package R: Tape & Reel	
AiT provides all RoHS products		


FEATURES

- Low Power Consumption: 1.0 μA (Typ.)
- Maximum Output Current: 250mA
- Small Dropout Voltage
210mV@100mA ($V_{OUT}=2.8V$)
430mV@200mA ($V_{OUT}=2.8V$)
- Input Voltage Range: 1.5V~8V
- Output Voltage Range: 1.1V~5.5V
(customized on command in 0.1V steps)
- Highly Accurate: $\pm 2\%$ ($\pm 1\%$ customized)
- Output Current Limit
- Available in SOT-23, SOT-25 and SOT89-3 packages

APPLICATION

- Battery Powered equipment
- Power Management of MP3、PDA、DSC、Mouse、PS2 Games
- Reference Voltage Source Regulation after Switching Power


TYPICAL APPLICATION

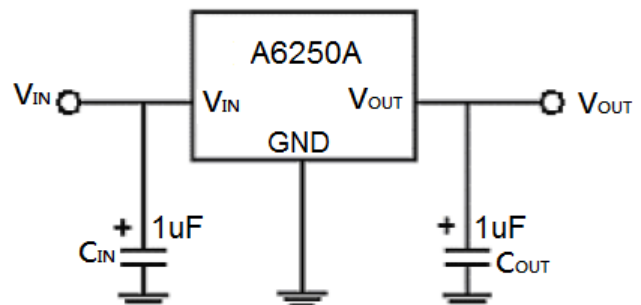

NOTE: Input capacitor ($C_{IN}=1\mu F$) and Output capacitor ($C_{OUT}=1\mu F$) are recommended in all application circuit. Ceramic capacitor is recommended.



PIN DESCRIPTION

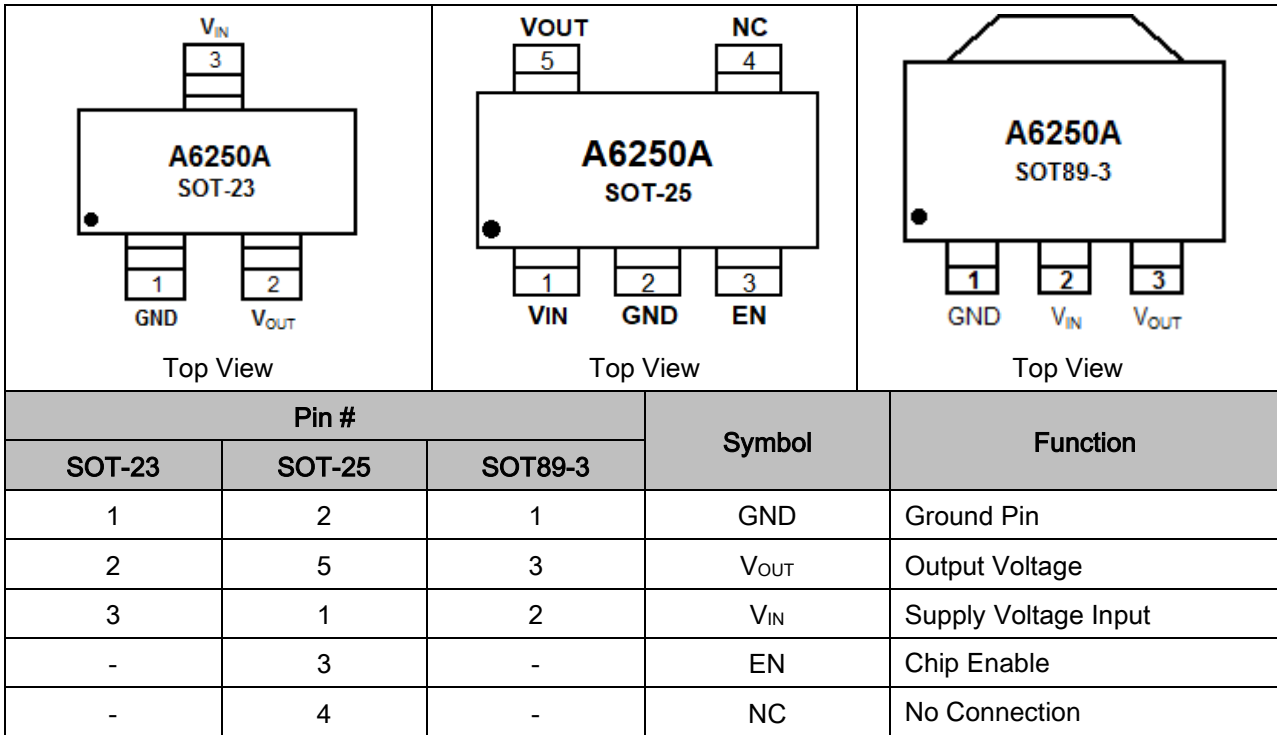



ABSOLUTE MAXIMUM RATINGS

Max Input Voltage	10V	
T _J , Operating Junction Temperature	125°C	
T _A , Ambient Temperature	-40°C ~85°C	
Power Dissipation	SOT-23	250mW
	SOT-25	250mW
	SOT89-3	500mW
T _S , Storage Temperature	-40°C ~150°C	
Lead Temperature & Time	260°C, 10s	

Stress beyond above listed "Absolute Maximum Ratings" may lead permanent damage to the device. These are stress ratings only and operations of the device at these or any other conditions beyond those indicated in the operational sections of the specifications are not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

RECOMMENDED OPERATING CONDITIONS

Parameter	Min	Max.	Unit
Input Voltage Range	-	8	V
Ambient Temperature	-40	85	°C

THERMAL RESISTANCE

Package	R _{θJA}	R _{θJC}
SOT-23	250°C/W	130°C/W
SOT-25	250°C/W	130°C/W
SOT89-3	160°C/W	45°C/W

NOTE: Thermal Resistance is specified with approximately 1 square of 1 oz copper.



ELECTRICAL CHARACTERISTICS


Test Conditions: $C_{IN}=1\mu F$, $C_{OUT}=1\mu F$, $T_A=25^\circ C$, Unless Otherwise Specified

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	
Input Voltage	V_{IN}		-	-	8	V	
Output Voltage	V_{OUT}		$V_{OUT} \times 0.98$	-	$V_{OUT} \times 1.02$	V	
Maximum Output Current	$I_{OUT(Max.)}$	$V_{IN}-V_{OUT}=1V$	-	250	-	mA	
Input-Output Voltage Differential	Dropout Voltage	$I_{OUT}=100mA$	$V_{OUT} \leq 1.8V$	-	600	1000	mV
			$V_{OUT} \geq 1.8V$	-	300	600	
Line Regulation	$\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$	$I_{OUT}=10mA$ $1.5V \leq V_{IN} \leq 8V$	-	0.2	0.3	%/V	
Load Regulation	ΔV_{OUT}	$V_{IN} = \text{Set } V_{OUT} + 1V$ $1mA \leq I_{OUT} \leq 100mA$	-	20	40	mV	
Quiescent Current	I_Q	$V_{IN} = \text{Set } V_{OUT} + 1V$	-	1.0	5.0	μA	
Output Voltage Temperature Coefficient	$\frac{\Delta V_{OUT}}{\Delta T \times V_{OUT}}$	$I_{OUT}=10mA$	-	100	-	ppm/ $^\circ C$	
CE Input Voltage "H"	V_{ENH}		1.5	-	V_{IN}	V	
CE Input Voltage "L"	V_{ENL}		0	-	0.2	V	




TYPICAL PERFORMANCE CHARACTERISTICS


1. Load regulation ($V_{IN}=4V$)

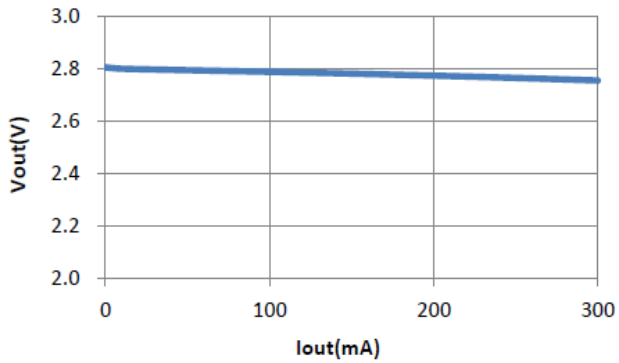


2. Line regulation

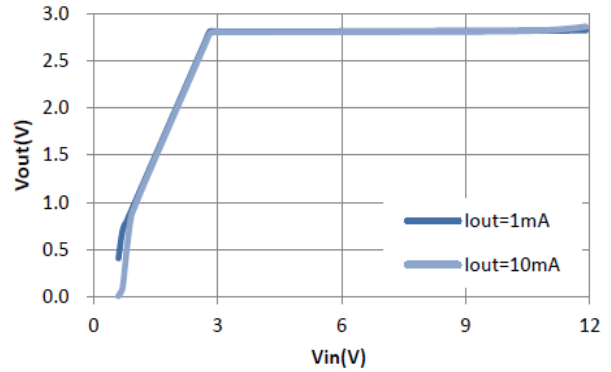


3. Drop out Voltage

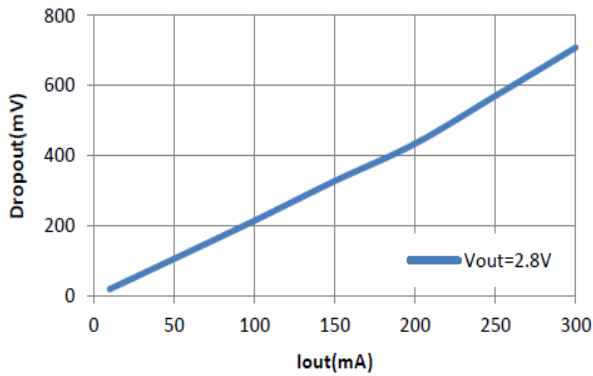


4. PSRR

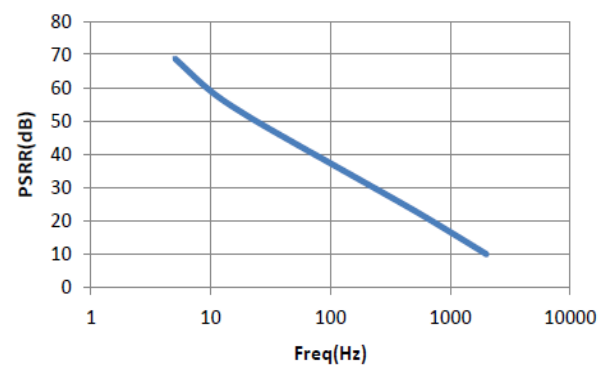

5. I_Q ($V_{OUT}=2.8V$)

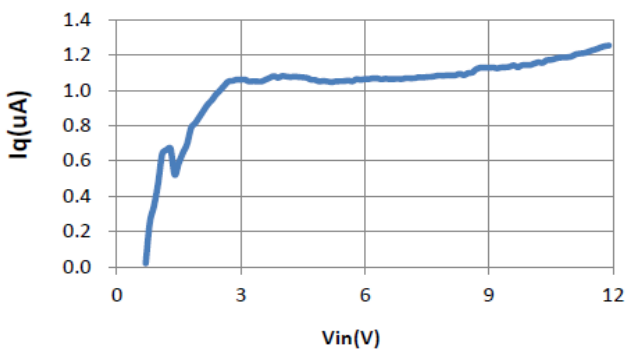


6. Output Voltage vs. Output Current $V_{OUT}=2.8V$

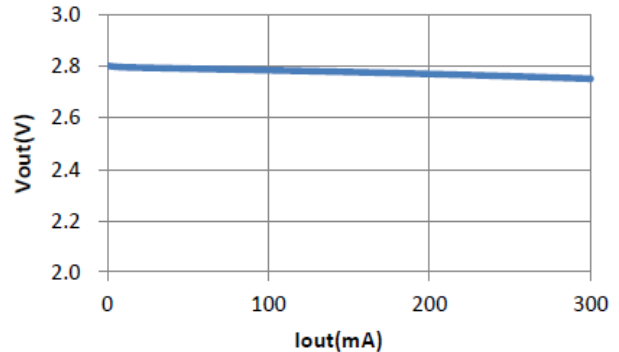




7. Current limit

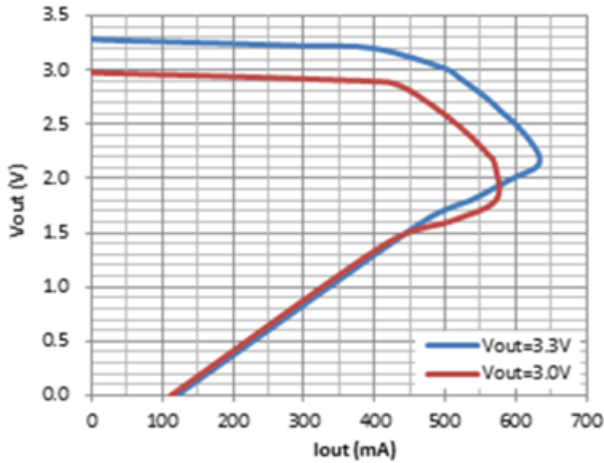


8. Current limit

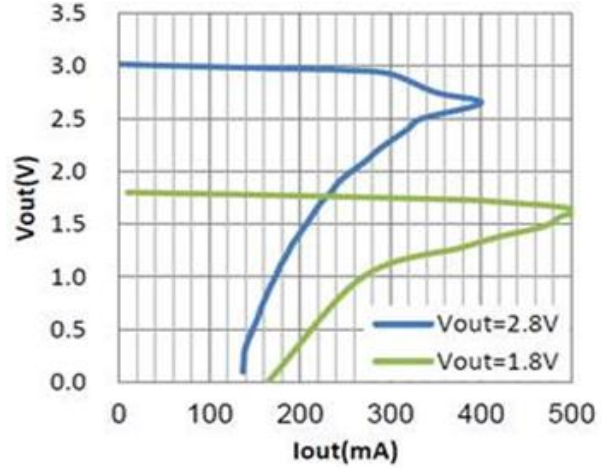


9. Line transient response

$C_{IN}=C_{OUT}=1\mu F$, $I_{OUT}=10mA$, $V_{OUT}=2.8V$

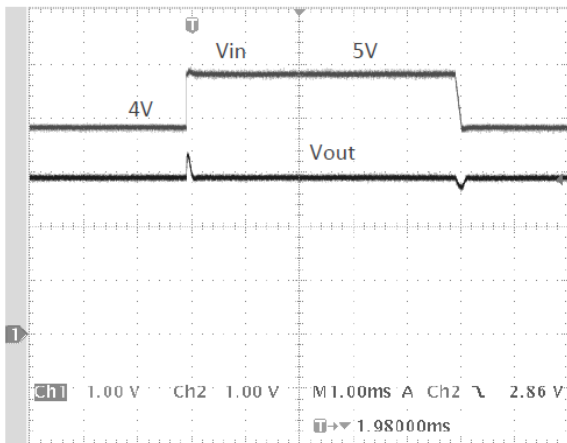


10. Load transient response

$C_{IN}=C_{OUT}=1\mu F$, $V_{IN}=4V$, $V_{OUT}=2.8V$

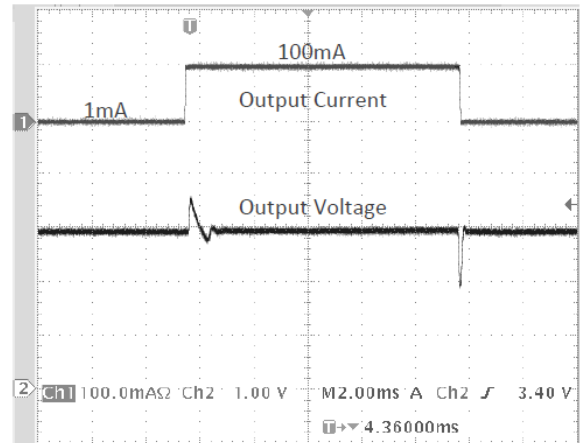


11. Start up

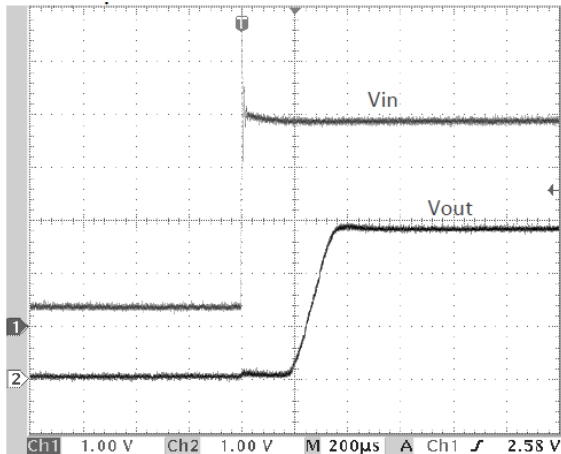


12. Quiescent Current vs. Temperature

$V_{IN}=5.0V$, $C_{IN}=C_{OUT}=1\mu F$

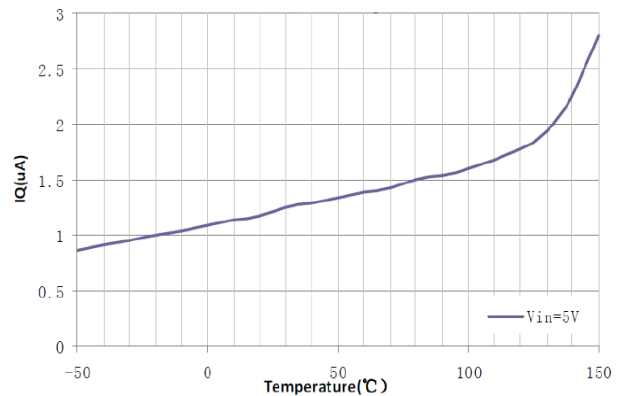



BLOCK DIAGRAM

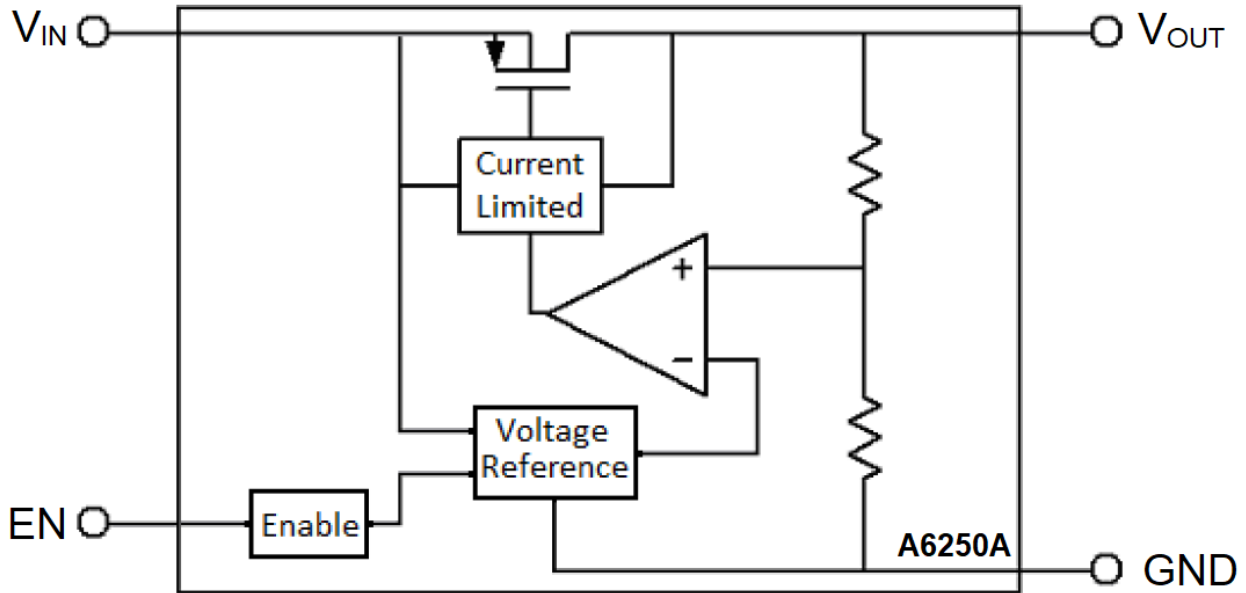

DETAILED INFORMATION

A6250A is a series of low dropout voltage and low power consumption three pins regulator. Its application circuit is very simple, which only needs two outside capacitors. It is composed of these modules: high accuracy voltage reference, current limit circuit, error amplifier, output driver and power transistor.


Current Limit module can keep chip and power system away from danger when load current is more than 250mA.

A6250A uses trimming technique to assure the accuracy of output value within $\pm 2\%$, at the same time, temperature compensation is elaborately considered in this chip, which makes A6250A's temperature coefficient within 100ppm/ $^{\circ}\text{C}$




PACKAGE INFORMATION

Dimension in SOT-23 Package (Unit: mm)

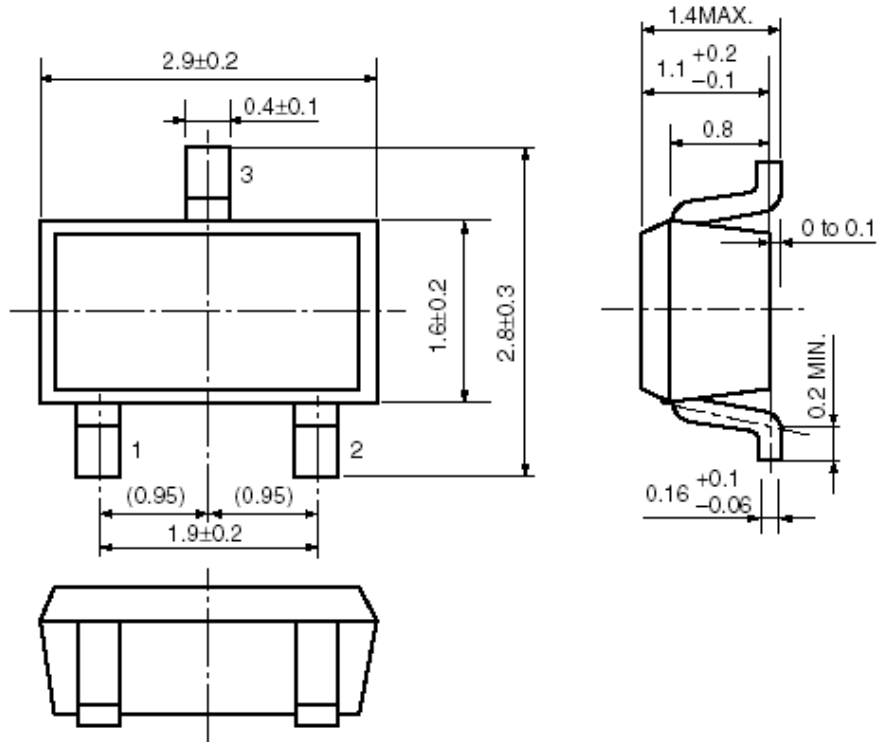



Dimension in SOT89-3 (Unit: mm)

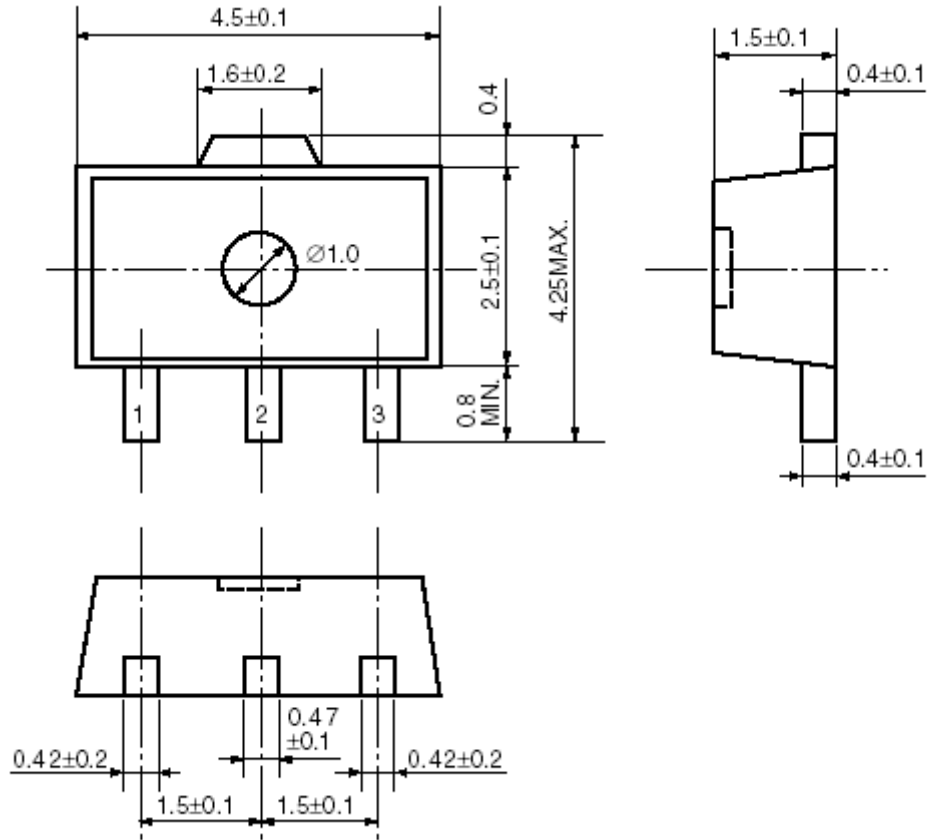



IMPORTANT NOTICE

AiT Semiconductor Inc. (AiT) reserves the right to make changes to any its product, specifications, to discontinue any integrated circuit product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

AiT Semiconductor Inc.'s integrated circuit products are not designed, intended, authorized, or warranted to be suitable for use in life support applications, devices or systems or other critical applications. Use of AiT products in such applications is understood to be fully at the risk of the customer. As used herein may involve potential risks of death, personal injury, or server property, or environmental damage. In order to minimize risks associated with the customer's applications, the customer should provide adequate design and operating safeguards.

AiT Semiconductor Inc. assumes to no liability to customer product design or application support. AiT warrants the performance of its products of the specifications applicable at the time of sale.