



●FEATURE

1. High performance (Isat) realized by metal dust core.
2. Low loss realized with low DCR
3. Capable of corresponding high frequency
4. Operating Temperature: -40 ~ +125°C
5. Compliant with AEC-Q200




●APPLICATION

Arrays (FPGA), POL Converters, Portable Power Like PDA, Digital Camera, Mainboards, Graphic Cards, CPU, RAM, Battery Powered Devices

●ORDERING INFORMATION

<u>WSI</u>	<u>04015</u>	<u>U</u>	<u>-1R0</u>	<u>M</u>	<u>Q</u>
Series	Dimension	Material code	Impedance	Tolerance	AEC-Q
	(L*W*H)	(J,M,E,W,L)	(Ω)	M=±20%	

●SHAPE AND DIMENSION

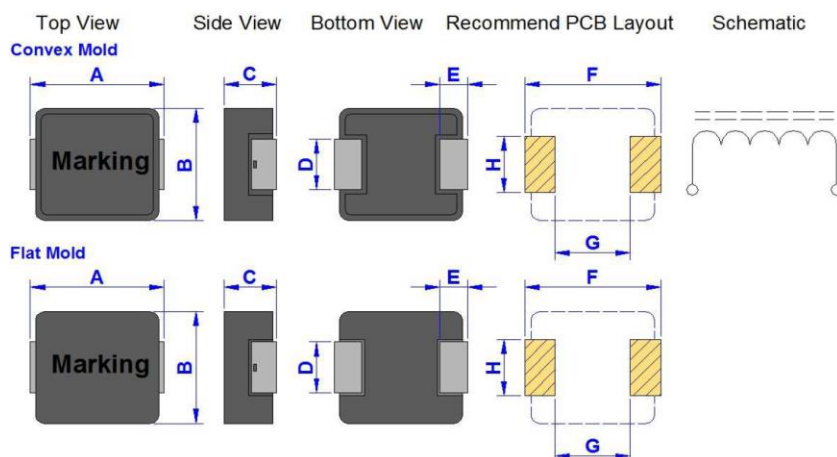



●SPECIFICATION

Unit: mm

Type	A	B	C	D	E	F	G	H
04012J	4.50±0.20	4.00±0.20	1.10±0.20	0.60±0.10	1.00±0.30	4.80 Ref.	2.20 Ref.	1.50 Ref.
04012M	4.45±0.25	4.06±0.25	1.10±0.10	2.00±0.30	0.76±0.30	4.80 Ref.	2.20 Ref.	2.50 Ref.
04015J	4.50±0.20	4.00±0.20	1.40±0.10	0.60±0.10	1.00±0.30	4.80 Ref.	2.20 Ref.	1.50 Ref.
04020E	4.50±0.20	4.00±0.20	1.80±0.20	1.50±0.30	0.76±0.30	4.80 Ref.	2.20 Ref.	2.50 Ref.
04020J	4.50±0.20	4.00±0.20	1.80±0.20	0.60±0.10	1.00±0.30	4.80 Ref.	2.20 Ref.	1.50 Ref.
05030E	5.70±0.30	5.20±0.30	2.80±0.20	2.30±0.30	1.30±0.30	5.70 Ref.	2.00 Ref.	3.00 Ref.
06018W	7.10±0.30	6.60±0.30	1.60±0.20	3.00±0.30	1.60±0.50	7.40 Ref.	3.70 Ref.	3.50 Ref.
06018E	7.10±0.30	6.60±0.30	1.60±0.20	3.00±0.30	1.60±0.50	7.40 Ref.	3.70 Ref.	3.50 Ref.
06024E	7.10±0.30	6.60±0.30	2.20±0.20	3.00±0.30	1.60±0.50	7.40 Ref.	3.70 Ref.	3.50 Ref.
06030E	7.10±0.30	6.60±0.30	2.80±0.20	3.00±0.30	1.60±0.50	7.40 Ref.	3.70 Ref.	3.50 Ref.
06030L	7.10±0.30	6.60±0.30	2.80±0.20	3.00±0.30	1.60±0.50	7.40 Ref.	3.70 Ref.	3.50 Ref.
06040J	7.60 Max.	6.60±0.30	4.00 Max.	1.20±0.30	1.60±0.50	7.40 Ref.	3.70 Ref.	2.50 Ref.
10040E	11.50±1.00	10.50±0.50	3.80±0.20	3.00±0.30	2.50±0.50	13.00 Ref.	6.00 Ref.	4.00 Ref.
10040L	11.50±1.00	10.50±0.50	3.80±0.20	3.00±0.50	2.50±0.50	13.00 Ref.	6.00 Ref.	4.00 Ref.
10050J	10.50±1.00	10.00±0.30	4.80±0.20	By Item	2.00±0.50	12.00 Ref.	5.50 Ref.	By Item
12050E	13.50±1.00	12.80±0.50	4.80±0.20	3.80±0.50	2.50±0.50	15.00 Ref.	6.00 Ref.	5.00 Ref.
12065E	13.50±1.00	12.80±0.50	6.20±0.30	3.80±0.50	2.50±0.50	15.00 Ref.	6.00 Ref.	5.00 Ref.



● **ELECTRICAL CHARACTERISTICS**

Part Number	Inductance (uH)	DCR (mΩ) Typ.	DCR (mΩ)Max.	Isat (A) Max.	Irms (A) Max.
WSI04012J-R22M	0.22	7.80	9.30	10.00	9.00
WSI04012J-R47M	0.47	16.50	20.00	9.00	6.50
WSI04012J-R56M	0.56	22.00	25.00	8.00	5.50
WSI04012J-R68M	0.68	18.80	20.68	8.00	5.40
WSI04012J-1R0M	1.00	28.30	33.60	6.33	4.80
WSI04012J-1R2M	1.20	41.00	45.00	6.00	3.00
WSI04012J-1R5M	1.50	45.00	50.00	5.50	3.00

* Test Condition: @100KHz, 1.0Vrms, 25°C Ambient

* M=Tolerance=±20%

* Irms: Rated Current Loading when temperature rise approximately 40°C.

* Isat: Saturated Current measured at the point of L drop approximately 20%

Part Number	Inductance (uH)	DCR (mΩ) Typ.	DCR (mΩ)Max.	Isat (A) Max.	Irms (A) Max.
WSI04012M-R33M	0.33	17.00	19.00	8.40	6.50
WSI04012M-R47M	0.47	19.00	21.00	6.80	6.00
WSI04012M-1R0M	1.00	43.00	47.00	5.20	4.20
WSI04012M-1R5M	1.50	68.00	75.00	4.00	3.25
WSI04012M-2R2M	2.20	79.40	83.50	3.50	2.75

* Test Condition: @100KHz, 1.0Vrms, 25°C Ambient

* M=Tolerance=±20%

* Irms: Rated Current Loading when temperature rise approximately 40°C.

* Isat: Saturated Current measured at the point of L drop approximately 20%

Part Number	Inductance (uH)	DCR (mΩ) Typ.	DCR (mΩ)Max.	Isat (A) Max.	Irms (A) Max.
WSI04015J-R22M	0.22	6.40	7.60	11.00	9.50
WSI04015J-R47M	0.47	12.00	14.40	9.00	7.50
WSI04015J-1R0M	1.00	23.50	27.00	7.00	5.00
WSI04015J-1R2M	1.20	28.30	33.60	6.00	4.90
WSI04015J-1R5M	1.50	32.00	38.40	6.00	4.00
WSI04015J-2R2M	2.20	47.00	56.40	4.50	3.00

* Test Condition: @100KHz, 1.0Vrms, 25°C Ambient

* M=Tolerance=±20%

* Irms: Rated Current Loading when temperature rise approximately 40°C.

* Isat: Saturated Current measured at the point of L drop approximately 20%



Part Number	Inductance (uH)	DCR (mΩ) Typ.	DCR (mΩ)Max.	Isat (A) Max.	Irms (A) Max.
WSI04020E-R10M	0.10	3.50	4.00	22.00	12.00
WSI04020E-R22M	0.22	6.00	6.60	12.50	9.00
WSI04020E-R47M	0.47	12.50	14.00	9.50	7.00
WSI04020E-R56M	0.56	14.00	16.00	10.00	6.50
WSI04020E-R68M	0.68	16.00	18.00	9.00	6.00
WSI04020E-1R0M	1.00	24.00	27.00	7.00	4.50
WSI04020E-1R2M	1.20	24.00	27.00	7.00	4.50
WSI04020E-1R5M	1.50	38.00	46.00	6.00	4.00
WSI04020E-2R2M	2.20	52.00	58.00	5.00	3.00
WSI04020E-3R3M	3.30	74.00	87.00	4.00	2.50
WSI04020E-4R7M	4.70	98.00	110.00	3.50	2.00
WSI04020E-6R8M	6.80	140.00	175.00	2.50	2.00
WSI04020E-100M	10.00	256.00	282.00	2.20	1.20

* Test Condition: @100KHz, 1.0Vrms, 25°C Ambient

* M=Tolerance=±20%

* Irms: Rated Current Loading when temperature rise approximately 40°C.

* Isat: Saturated Current measured at the point of L drop approximately 20%

Part Number	Inductance (uH)	DCR (mΩ) Typ.	DCR (mΩ)Max.	Isat (A) Max.	Irms (A) Max.
WSI04020J-R22M	0.22	5.40	7.00	11.50	11.50
WSI04020J-R36M	0.36	9.50	12.00	11.00	9.00
WSI04020J-R47M	0.47	10.00	12.00	10.00	7.00
WSI04020J-R56M	0.56	12.80	14.70	8.00	7.00
WSI04020J-R68M	0.68	13.50	17.00	7.00	6.30
WSI04020J-R82M	0.82	16.00	18.00	6.50	6.00
WSI04020J-R88M	0.88	16.00	18.00	6.50	6.00
WSI04020J-1R0M	1.00	18.00	21.50	5.00	5.00
WSI04020J-1R2M	1.20	19.00	22.00	5.00	5.00
WSI04020J-1R5M	1.50	25.40	29.00	5.00	5.00
WSI04020J-2R2M	2.20	33.00	40.00	5.00	3.90
WSI04020J-3R3M	3.30	42.00	48.00	4.30	3.30
WSI04020J-4R7M	4.70	68.00	75.00	4.00	2.70
WSI04020J-5R6M	5.60	81.00	90.00	3.50	2.40

* Test Condition: @100KHz, 1.0Vrms, 25°C Ambient

* M=Tolerance=±20%

* Irms: Rated Current Loading when temperature rise approximately 40°C.

* Isat: Saturated Current measured at the point of L drop approximately 20%



Part Number	Inductance (uH)	DCR (mΩ) Typ.	DCR (mΩ)Max.	Isat (A) Max.	Irms (A) Max.
WSI05030E-R20M	0.20	3.50	3.90	14.50	18.00
WSI05030E-R47M	0.47	7.40	8.50	12.00	13.50
WSI05030E-R68M	0.68	11.00	12.00	14.00	8.50
WSI05030E-1R0M	1.00	13.00	14.00	11.00	7.00
WSI05030E-1R2M	1.20	15.00	16.00	11.00	6.50
WSI05030E-1R5M	1.50	20.00	25.00	8.50	6.00
WSI05030E-2R2M	2.20	25.00	29.00	7.50	5.50
WSI05030E-3R3M	3.30	32.00	38.00	6.00	5.00
WSI05030E-4R7M	4.70	50.00	60.00	5.00	3.50
WSI05030E-6R8M	6.80	75.00	90.00	4.00	3.00
WSI05030E-100M	10.00	110.00	125.00	3.50	2.50

* Test Condition: @100KHz, 1.0Vrms, 25°C Ambient

* M=Tolerance=±20%

* Irms: Rated Current Loading when temperature rise approximately 40°C.

* Isat: Saturated Current measured at the point of L drop approximately 20%

Part Number	Inductance (uH)	DCR (mΩ) Typ.	DCR (mΩ)Max.	Isat (A) Max.	Irms (A) Max.
WSI06018W-R47M	0.47	8.80	9.30	18.00	11.00
WSI06018W-1R0M	1.00	18.00	18.30	14.00	7.00
WSI06018W-1R5M	1.50	27.40	34.00	11.50	4.00
WSI06018W-2R2M	2.20	44.60	46.00	11.00	3.75
WSI06018W-3R3M	3.30	78.00	84.00	8.00	3.50
WSI06018W-4R7M	4.70	98.00	110.00	5.00	3.00

* Test Condition: @100KHz, 1.0Vrms, 25°C Ambient

* M=Tolerance=±20%

* Irms: Rated Current Loading when temperature rise approximately 40°C.

* Isat: Saturated Current measured at the point of L drop approximately 20%

Part Number	Inductance (uH)	DCR (mΩ) Typ.	DCR (mΩ)Max.	Isat (A) Max.	Irms (A) Max.
WSI06018E-R22M	0.22	5.30	5.70	26.00	14.00
WSI06018E-R33M	0.33	6.60	7.00	18.00	12.00
WSI06018E-R47M	0.47	8.40	9.30	18.00	11.00
WSI06018E-R68M	0.68	12.70	13.90	17.00	9.00
WSI06018E-R82M	0.82	13.80	15.90	17.00	8.00
WSI06018E-1R0M	1.00	17.50	18.30	14.00	7.00
WSI06018E-1R5M	1.50	32.60	34.00	11.50	4.00
WSI06018E-2R2M	2.20	40.30	46.00	11.00	3.75
WSI06018E-2R5M	2.50	49.90	52.40	10.40	3.50
WSI06018E-3R3M	3.30	56.20	60.10	10.00	3.25
WSI06018E-4R7M	4.70	76.00	78.00	8.00	3.00

* Test Condition: @100KHz, 1.0Vrms, 25°C Ambient

* M=Tolerance=±20%

* Irms: Rated Current Loading when temperature rise approximately 40°C.

* Isat: Saturated Current measured at the point of L drop approximately 20%



Part Number	Inductance (uH)	DCR (mΩ) Typ.	DCR (mΩ)Max.	Isat (A) Max.	Irms (A) Max.
WSI06024E-R10M	0.10	1.50	1.70	50.00	30.00
WSI06024E-R22M	0.22	2.90	3.20	34.00	21.00
WSI06024E-R33M	0.33	3.70	4.10	22.00	18.00
WSI06024E-R47M	0.47	6.00	6.50	21.00	13.50
WSI06024E-R68M	0.68	8.70	9.40	18.00	11.00
WSI06024E-R82M	0.82	10.60	11.80	17.00	10.00
WSI06024E-1R0M	1.00	13.00	14.20	16.00	9.00
WSI06024E-1R5M	1.50	18.50	21.20	15.00	7.50
WSI06024E-2R2M	2.20	28.00	34.00	14.00	6.50
WSI06024E-3R3M	3.30	36.50	51.60	13.00	5.00
WSI06024E-4R7M	4.70	45.00	63.00	9.00	4.50
WSI06024E-5R6M	5.60	66.00	73.00	8.00	4.00
WSI06024E-6R8M	6.80	72.50	95.00	7.00	3.60
WSI06024E-8R2M	8.20	84.00	106.00	6.50	3.00
WSI06024E-100M	10.00	116.00	129.00	6.00	2.50

* Test Condition: @100KHz, 1.0Vrms, 25°C Ambient

* M=Tolerance=±20%

* Irms: Rated Current Loading when temperature rise approximately 40°C.

* Isat: Saturated Current measured at the point of L drop approximately 20%

Part Number	Inductance (uH)	DCR (mΩ) Typ.	DCR (mΩ)Max.	Isat (A) Max.	Irms (A) Max.
WSI06030E-R10M	0.10	1.50	1.70	60.00	32.50
WSI06030E-R15M	0.15	1.90	2.50	52.00	26.00
WSI06030E-R20M	0.20	2.40	3.00	41.00	24.00
WSI06030E-R22M	0.22	2.50	2.80	40.00	23.00
WSI06030E-R33M	0.33	3.50	3.90	30.00	20.00
WSI06030E-R47M	0.47	4.00	4.20	26.00	17.50
WSI06030E-R56M	0.56	5.00	5.50	25.00	15.50
WSI06030E-R68M	0.68	5.00	5.50	25.00	15.50
WSI06030E-R82M	0.82	6.70	8.00	24.00	13.00
WSI06030E-1R0M	1.00	9.00	10.00	22.00	11.00
WSI06030E-1R5M	1.50	14.00	15.00	18.00	9.00
WSI06030E-2R2M	2.20	18.00	20.00	14.00	8.00
WSI06030E-3R3M	3.30	28.00	30.00	13.50	6.00
WSI06030E-4R7M	4.70	37.00	40.00	10.00	5.50
WSI06030E-6R8M	6.80	54.00	60.00	8.00	4.50
WSI06030E-8R2M	8.20	64.00	68.00	7.50	4.00
WSI06030E-100M	10.00	102.00	105.00	7.00	3.00

* Test Condition: @100KHz, 1.0Vrms, 25°C Ambient

* M=Tolerance=±20%

* Irms: Rated Current Loading when temperature rise approximately 40°C.

* Isat: Saturated Current measured at the point of L drop approximately 20%



Part Number	Inductance (uH)	DCR (mΩ) Typ.	DCR (mΩ)Max.	Isat (A) Max.	Irms (A) Max.
WSI06030L-1R0M	1.00	7.60	8.00	9.50	12.50
WSI06030L-1R5M	1.50	11.70	12.50	8.00	10.50
WSI06030L-2R2M	2.20	15.70	16.50	7.00	9.00
WSI06030L-3R3M	3.30	24.80	26.00	6.50	7.00
WSI06030L-4R7M	4.70	31.80	33.40	4.00	6.00
WSI06030L-6R8M	6.80	44.60	46.80	4.00	5.50
WSI06030L-8R2M	8.20	52.30	54.90	4.00	5.00
WSI06030L-100M	10.00	67.80	71.20	3.50	4.00
WSI06030L-150M	15.00	110.00	125.00	3.00	3.50
WSI06030L-220M	22.00	128.90	135.00	2.50	2.90

* Test Condition: @100KHz, 1.0Vrms, 25°C Ambient

* M=Tolerance=±20%

* Irms: Rated Current Loading when temperature rise approximately 40°C.

* Isat: Saturated Current measured at the point of L drop approximately 20%

Part Number	Inductance (uH)	DCR (mΩ) Typ.	DCR (mΩ)Max.	Isat (A) Max.	Irms (A) Max.
WSI06040J-R22M	0.22	2.00	2.40	34.00	23.00
WSI06040J-R33M	0.33	3.00	3.40	30.00	18.00
WSI06040J-R36M	0.36	3.60	4.30	28.00	18.00
WSI06040J-R47M	0.47	3.80	4.50	27.00	17.00
WSI06040J-R50M	0.50	2.80	3.40	21.00	20.00
WSI06040J-R56M	0.56	4.30	5.00	20.00	16.00
WSI06040J-R68M	0.68	4.50	5.00	20.00	16.00
WSI06040J-R82M	0.82	5.50	6.60	17.00	13.00
WSI06040J-1R1M	1.10	4.60	5.50	19.00	15.30
WSI06040J-1R5M	1.50	8.00	10.00	13.00	11.50
WSI06040J-2R2M	2.20	9.80	12.00	11.00	11.00
WSI06040J-3R3M	3.30	12.50	16.00	10.00	10.00
WSI06040J-4R7M	4.70	18.40	24.00	8.00	6.70
WSI06040J-5R6M	5.60	21.00	29.00	8.00	6.30
WSI06040J-6R8M	6.80	29.00	33.00	7.00	6.00
WSI06040J-8R2M	8.20	34.00	39.00	5.50	5.00
WSI06040J-100M	10.00	42.50	45.00	5.00	4.10
WSI06040J-120M	12.00	46.30	53.00	5.00	4.00

* Test Condition: @100KHz, 1.0Vrms, 25°C Ambient

* M=Tolerance=±20%

* Irms: Rated Current Loading when temperature rise approximately 40°C.

* Isat: Saturated Current measured at the point of L drop approximately 20%



Part Number	Inductance (uH)	DCR (mΩ) Typ.	DCR (mΩ)Max.	Isat (A) Max.	Irms (A) Max.
WSI10040E-R19M	0.19	0.88	0.95	90.00	40.00
WSI10040E-R36M	0.36	1.30	1.40	60.00	31.50
WSI10040E-R56M	0.56	1.70	1.80	49.00	27.50
WSI10040E-1R0M	1.00	3.70	4.10	36.00	17.50
WSI10040E-1R5M	1.50	5.30	5.80	27.50	15.00
WSI10040E-2R2M	2.20	8.20	9.00	25.50	12.00
WSI10040E-3R3M	3.30	10.80	11.80	18.60	10.00
WSI10040E-4R7M	4.70	15.00	16.50	17.00	9.50
WSI10040E-5R6M	5.60	17.60	19.30	16.00	8.50
WSI10040E-6R8M	6.80	21.20	23.30	13.50	8.00
WSI10040E-8R2M	8.20	31.00	34.00	12.50	7.00
WSI10040E-100M	10.00	33.20	36.50	12.00	6.80

* Test Condition: @100KHz, 1.0Vrms, 25°C Ambient

* M=Tolerance=±20%

* Irms: Rated Current Loading when temperature rise approximately 40°C.

* Isat: Saturated Current measured at the point of L drop approximately 20%

Part Number	Inductance (uH)	DCR (mΩ) Typ.	DCR (mΩ)Max.	Isat (A) Max.	Irms (A) Max.
WSI10040L-R19M	0.19	0.70	0.80	46.00	40.00
WSI10040L-R24M	0.24	0.85	0.95	44.00	33.00
WSI10040L-R36M	0.36	1.05	1.15	30.00	32.00
WSI10040L-R47M	0.47	1.53	1.68	30.00	30.00
WSI10040L-R56M	0.56	1.60	1.80	22.00	32.00
WSI10040L-R78M	0.78	1.80	1.90	22.00	27.00
WSI10040L-1R0M	1.00	2.30	2.50	20.00	25.00
WSI10040L-1R8M	1.80	4.50	5.00	16.00	17.00
WSI10040L-2R0M	2.00	5.20	5.80	14.00	16.00
WSI10040L-3R3M	3.30	8.20	9.00	14.00	12.00
WSI10040L-4R7M	4.70	12.90	14.20	7.60	9.50
WSI10040L-6R8M	6.80	17.50	19.30	7.50	9.00
WSI10040L-100M	10.00	27.80	30.50	7.10	7.50
WSI10040L-150M	15.00	40.90	45.00	6.00	6.25
WSI10040L-220M	22.00	60.40	66.00	4.50	5.00
WSI10040L-330M	33.00	87.50	94.50	4.00	4.40
WSI10040L-470M	47.00	132.00	145.00	3.00	4.00
WSI10040L-560M	56.00	150.00	170.00	2.80	3.80
WSI10040L-680M	68.00	175.00	200.00	2.60	3.50
WSI10040L-820M	82.00	210.00	240.00	2.40	3.20
WSI10040L-101M	100.00	249.00	270.00	2.25	3.00

* Test Condition: @100KHz, 1.0Vrms, 25°C Ambient

* M=Tolerance=±20%

* Irms: Rated Current Loading when temperature rise approximately 40°C.

* Isat: Saturated Current measured at the point of L drop approximately 20%



Part Number	Inductance (uH)	DCR (mΩ) Typ.	DCR (mΩ)Max.	Isat (A) Max.	Irms (A) Max.	Dimension "D" (mm)	Dimension "H" Ref.
WSI10050J-R45M	0.45	0.90	1.10	29.00	36.00	3.0±0.5	4.0 Ref.
WSI10050J-R56M	0.56	1.20	1.40	31.00	32.00	3.0±0.5	4.0 Ref.
WSI10050J-1R0M	1.00	2.30	2.50	25.00	25.00	3.0±0.5	4.0 Ref.
WSI10050J-1R2M	1.20	2.50	3.00	21.00	24.00	3.0±0.5	4.0 Ref.
WSI10050J-2R2M	2.20	5.30	6.30	19.00	14.00	3.0±0.5	4.0 Ref.
WSI10050J-4R7M	4.70	10.50	11.50	14.00	10.00	1.8±0.5	3.0 Ref.
WSI10050J-6R8M	6.80	13.50	15.50	11.00	9.00	3.0±0.5	4.0 Ref.
WSI10050J-100M	10.00	21.00	25.20	10.00	7.20	3.0±0.5	4.0 Ref.
WSI10050J-150M	15.00	38.00	45.60	8.00	4.50	1.8±0.5	3.0 Ref.
WSI10050J-220M	22.00	51.00	61.20	7.00	4.00	1.8±0.5	3.0 Ref.

* Test Condition: @100KHz, 1.0Vrms, 25°C Ambient

* M=Tolerance=±20%

* Irms: Rated Current Loading when temperature rise approximately 40°C.

* Isat: Saturated Current measured at the point of L drop approximately 20%

Part Number	Inductance (uH)	DCR (mΩ) Typ.	DCR (mΩ)Max.	Isat (A) Max.	Irms (A) Max.
WSI12050E-R10M	0.10	0.53	0.60	118.00	55.00
WSI12050E-R22M	0.22	0.64	0.80	110.00	51.00
WSI12050E-R33M	0.33	0.85	1.10	80.00	42.00
WSI12050E-R47M	0.47	1.10	1.30	65.00	38.00
WSI12050E-R56M	0.56	1.30	1.50	55.00	36.00
WSI12050E-R68M	0.68	1.50	1.70	54.00	34.00
WSI12050E-R82M	0.82	2.00	2.30	53.00	31.00
WSI12050E-1R0M	1.00	2.10	2.50	50.00	29.00
WSI12050E-1R2M	1.20	2.80	3.50	49.00	25.00
WSI12050E-1R5M	1.50	3.40	4.10	48.00	23.00
WSI12050E-1R8M	1.80	4.20	4.90	40.00	19.00
WSI12050E-2R2M	2.20	4.60	5.50	32.00	20.00
WSI12050E-3R3M	3.30	7.70	9.20	32.00	15.00
WSI12050E-4R7M	4.70	12.80	15.00	27.00	12.00
WSI12050E-5R6M	5.60	14.00	16.50	22.00	11.50
WSI12050E-6R8M	6.80	15.40	18.50	21.00	11.00
WSI12050E-7R8M	7.80	17.20	20.50	18.00	10.00
WSI12050E-8R2M	8.20	18.90	22.50	18.00	9.50
WSI12050E-100M	10.00	21.40	25.50	16.00	9.00

* Test Condition: @100KHz, 1.0Vrms, 25°C Ambient

* M=Tolerance=±20%

* Irms: Rated Current Loading when temperature rise approximately 40°C.

* Isat: Saturated Current measured at the point of L drop approximately 20%



Part Number	Inductance (uH)	DCR (mΩ) Typ.	DCR (mΩ)Max.	Isat (A) Max.	Irms (A) Max.
WSI12065E-R10M	0.10	0.47	0.50	120.00	60.00
WSI12065E-R15M	0.15	0.53	0.60	118.00	55.00
WSI12065E-R22M	0.22	0.63	0.70	112.00	53.00
WSI12065E-R30M	0.30	0.70	0.80	72.00	48.00
WSI12065E-R33M	0.33	0.83	0.90	65.00	46.00
WSI12065E-R40M	0.40	0.90	1.00	64.00	44.00
WSI12065E-R47M	0.47	1.00	1.20	63.00	41.00
WSI12065E-R56M	0.56	1.20	1.40	62.00	37.00
WSI12065E-R68M	0.68	1.40	1.60	60.00	35.00
WSI12065E-R82M	0.82	1.60	1.90	50.00	33.00
WSI12065E-1R0M	1.00	1.70	2.00	49.00	32.00
WSI12065E-1R2M	1.20	2.10	2.50	48.00	30.00
WSI12065E-1R5M	1.50	2.50	3.00	45.00	27.00
WSI12065E-1R8M	1.80	2.80	3.20	41.00	24.00
WSI12065E-2R2M	2.20	3.50	4.20	40.00	22.00
WSI12065E-3R3M	3.30	5.70	6.80	35.00	18.00
WSI12065E-4R7M	4.70	9.30	11.20	30.00	13.50
WSI12065E-5R6M	5.60	11.80	12.80	26.50	12.00
WSI12065E-6R8M	6.80	13.10	14.00	16.50	11.50
WSI12065E-8R2M	8.20	14.50	15.50	16.00	10.50
WSI12065E-100M	10.00	15.80	16.80	15.50	10.00
WSI12065E-120M	12.00	23.00	26.00	14.00	9.00
WSI12065E-150M	15.00	25.00	29.00	9.00	6.00
WSI12065E-220M	22.00	34.00	39.00	7.50	5.00
WSI12065E-330M	33.00	55.00	65.00	6.00	4.00
WSI12065E-470M	47.00	80.00	92.00	5.00	3.00

* Test Condition: @100KHz, 1.0Vrms, 25°C Ambient

* M=Tolerance=±20%

* Irms: Rated Current Loading when temperature rise approximately 40°C.

* Isat: Saturated Current measured at the point of L drop approximately 20%



●RELIABILITY

Test Item	Test Condition	Specification												
Dimension	Actual Size ...	Meet Spec												
Thermal Shock (Temperature Cycle)	Temperature: -40 ~ +125°C kept stabilized for 30 min. each Cycle: 100 Cycles (power off)	Elec. no variation Appearance no deformation												
Humidity Resistance	Humidity: 90% ~ 95% RH Temperature: 60 ± 2°C Test Time: 96 ± 2 Hours	Elec. no variation Appearance no deformation												
High Temperature	Temperature: 125 ± 2°C Testing Time: 96 ± 2 Hours	Elec. no variation Appearance no deformation												
Low Temperature	Temperature: -40 ± 2°C Time: 96 ± 2 Hours	Elec. no variation Appearance no deformation												
Temperature and Humidity Cycle	<table border="1"> <thead> <tr> <th>Temperature</th> <th>Humidity</th> <th>Time</th> </tr> </thead> <tbody> <tr> <td>25°C</td> <td>90% ~ 95% RH</td> <td>3.0 Hr</td> </tr> <tr> <td>55°C</td> <td>95% ~ 96% RH</td> <td>5.0 Hr</td> </tr> <tr> <td>25°C</td> <td>90% ~ 95% RH</td> <td>3.0 Hr</td> </tr> </tbody> </table>	Temperature	Humidity	Time	25°C	90% ~ 95% RH	3.0 Hr	55°C	95% ~ 96% RH	5.0 Hr	25°C	90% ~ 95% RH	3.0 Hr	Elec. no variation Appearance no deformation
	Temperature	Humidity	Time											
	25°C	90% ~ 95% RH	3.0 Hr											
	55°C	95% ~ 96% RH	5.0 Hr											
25°C	90% ~ 95% RH	3.0 Hr												
Cycle: 20 Cycles														
Vibration	Frequency: 10Hz ~ 55Hz , Amplitude: 1.5 mm Direction: X, Y, Z, Time: 2 Hours each	Elec. no variation Appearance no deformation												
Solderability	Go through real SMT IR-Reflow The profile like our suggest profile. Preheat: 160 ± 10°C (90 sec) Peak: 245 ± 5°C Peak Time: 50 Sec. / up 217°C	Elec. no variation Appearance no deformation												
Soldering Heat Resistance	Preheat: 160 ± 10°C (90 sec) Solder: Sn / Ag / Cu (Pb Free) Solder Temp.: 260 ± 5°C, Time: 3 ± 1 seconds	Elec. no variation Appearance no deformation												
Iron Solder Heat Resistance	Solder Temp.: 350 ± 5°C Flux: Rosin, Time: 3 ± 1 seconds	Elec. no variation Appearance no deformation												
Bending Strength	<p>Unit : mm</p> <p>Force : 1Kg / min.</p>	Elec. no variation Appearance no deformation												
Flexure Strength	<p>Unit : mm</p> <p>Solder cream 0.15 mm</p>	Elec. no variation Appearance no deformation												
Terminal Strength	<p>Mount on PCB Solder Cream 0.15 mm</p> <p>Push 10N force to X , Y direction</p>	Elec. no variation Appearance no deformation												
High-Voltage	100 V DC between core & winding	Elec. no variation Appearance no deformation												
Load life	Temperature: 25 ± 3°C Load: Allowed DC Current, Test Time: 96 ± 2 Hours	Elec. no variation Appearance no deformation												



● **TEST EQUIPMENT**

1. HP4284A, HP42841A - L, Q, DCR, IDC
2. HP8753D Network analyzer – SRF

● **OPERATING & STORAGE CONDITION**

1. Operating Temp: -40 ~ +125°C (Including self - temperature rise)
2. Storage Temp: a. Product with Taping: -10 ~ 45°C, 50 ~ 60% RH
b. On Board: -40 ~ +125°C
3. Storage Life Time: 12 Month (Less than 40°C and 60% RH)


Standard Atmosphere Conditions:

Ambient Temperature 20 ± 15°C; Humidity RH 65 ± 20%

If there may be any doubt on the test result, Measurement shall be made within the following limits:

Ambient Temperature 25 ± 5°C; Humidity RH 75 ± 10%

● **RECOMMEND REFLOW CURVE (TIME: Second)**

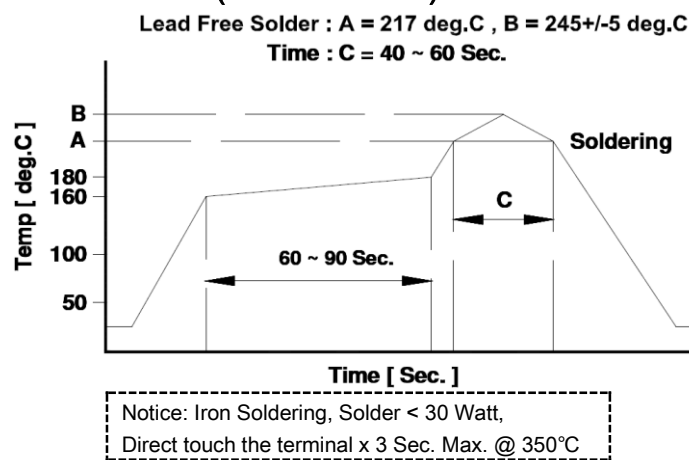

● **ATTENTION & CAUTION:**

- * Keep out of Splashing water or salt water
- * Avoid Toxic Gas (Hydrogen sulfide, Sulfurous acid, Chlorine, Ammonia)
- * Vibrations or shocks which exceed the specified condition
- * Dew condense
- * Layout near the edge of PCB
- * Over flexure after SMT mounting & PCBA
- * Pin foot or SMD pad solder ability: Pb free type is best within 6 months after delivery
- * Humidity sensitive, IPC/JEDEC J-STD-020 MSL if over Level 1, recommend bake 30mins@150°C before PCBA
- * Caution for human life relative applications: PLS contact & consult with AiT team in design stage.



Care Note for Use:


- (1) Storage Condition:
Temperature 25 to 35°C, Humidity 45 to 60% RH
- (2) Use Temperature:
 - a. Minimum Temperature: -40°C Ambient temperature of this product.
 - b. Maximum Temperature: +125°C The value of temperature including ambient and temperature rise of this product.
 - c. Reliability test temperature range from -40 ~ +125°C
 - d. However, this is not meant as temperature grade guarantee for UL.
- (3) Model:
When this product was used in a similar or as new product to the original one, sometimes it might be unable to satisfy the specifications due to difference in condition of usage.
- (4) Drop:
If this product suffered mechanical stress such as drop, characteristics may become poor (due to damage on coil / bobbin / ferrite ... etc.)
Never use such stressed product.

Care Note for Safety:

- (1) Provision to Abnormal Condition:
This product itself does not have any protective function in abnormal condition such as overload, short-circuit and open-circuit conditions, etc.
Therefore, it shall be confirmed from the end product that there is no risk of smoking, fire, dielectric withstand voltage insulation resistance, etc. in abnormal conditions to provide protective devices and /or protection circuit in the end product.
- (2) Temperature Rise:
Temperature rise on this product depends on the installation condition on end products.
It shall be confirmed on the actual end product that temperature rise of this product is within the specified temperature class limit.
- (3) Dielectric Strength:
Dielectric withstanding test with higher voltage than specific value will damage insulating material and shorten its life.
- (4) Water:
This product must not be used in wet condition resulted from water, coffee or any liquid contact because insulation strength becomes very low under such condition.
- (5) Potting:
If this product is potted in some compound, coating material of magnet wire might be occasionally damaged. Please ask us if you intend to pot this product.
- (6) Detergent:
Please consult AiT Semi immediately once under such circumstances because product reliability confirmation etc. is needed when this product come in contact with these chemicals.




●TAPE DIMENSION: mm

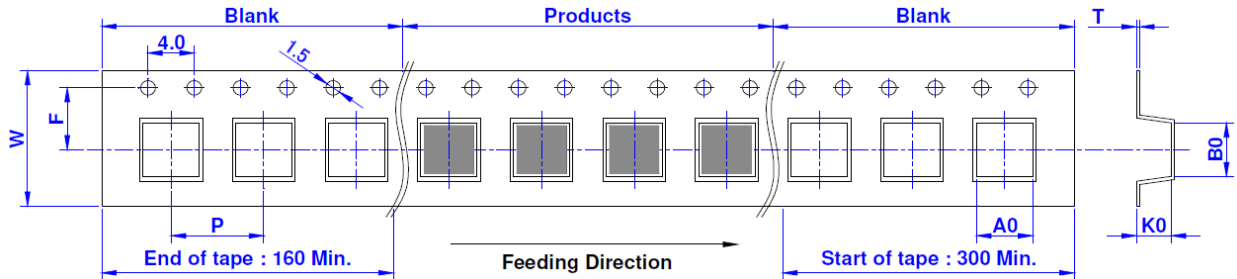

SIZE/mm	W	P	A0	B0	K0	T	F
04012	12.00	8.00	4.20	4.60	1.70	0.30	5.50
04012M	12.00	8.00	4.55	4.75	1.50	0.30	5.50
04015	12.00	8.00	4.20	4.60	2.00	0.30	5.50
04020	12.00	8.00	4.20	4.60	2.50	0.30	5.50
05030	16.00	12.00	5.70	5.90	3.40	0.40	11.50
06018	16.00	12.00	6.90	7.60	2.00	0.40	7.50
06024	16.00	12.00	6.90	7.60	2.80	0.40	7.50
06030	16.00	12.00	6.90	7.60	3.40	0.40	7.50
06040	16.00	12.00	7.20	7.70	4.60	0.30	7.50
10040	24.00	16.00	11.00	12.60	4.10	0.40	11.50
10050	24.00	16.00	10.25	12.30	5.80	0.30	11.50
12050	24.00	16.00	13.10	14.90	5.30	0.40	11.50
12065	24.00	16.00	13.10	14.90	6.70	0.40	11.50




●REEL DIMENSION: mm

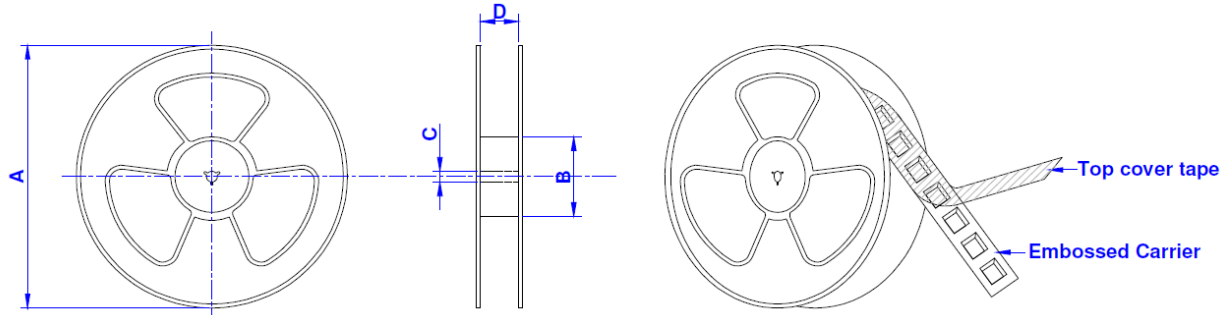

SIZE / mm	REEL SIZE	A	B	C	D	QTY/REEL
04012	13" x 12 mm	330	100	13	12.5	2000 PCS
04012M	7" x 12 mm	178	60	13	12.5	3000 PCS
04015	13" x 12 mm	330	100	13	12.5	2000 PCS
04020	13" x 12 mm	330	100	13	12.5	2000 PCS
05030	13" x 16 mm	330	100	13	16.5	1500 PCS
06018E	13" x 16 mm	330	100	13	16.5	2000 PCS
06018W	13" x 16 mm	330	100	13	16.5	3000 PCS
06024	13" x 16 mm	330	100	13	16.5	1500 PCS
06030	13" x 16 mm	330	100	13	16.5	1000 PCS
06040	13" x 16 mm	330	100	13	16.5	1000 PCS
10040	13" x 24 mm	330	100	13	24.5	800 PCS
10050	13" x 24 mm	330	100	13	24.5	700 PCS
12050	13" x 24 mm	330	100	13	24.5	500 PCS
12065	13" x 24 mm	330	100	13	24.5	400 PCS




●TEARING OFF FORCE:

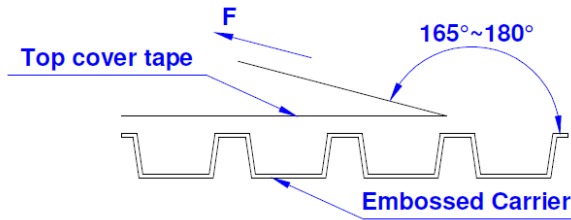

The force for tearing off cover tape is 10 to 130 grams in the arrow direction under the following conditions (referenced ANSI/EIA - 481 - D - 2008 of 4.11 standard).

Room Temp. (°C)	Room Humidity (%)	Room Atm. (hPa)	Tearing Speed (mm / min)
5 ~ 35	45 ~ 85	860~1060	300

●BOX PACKAGE: cm

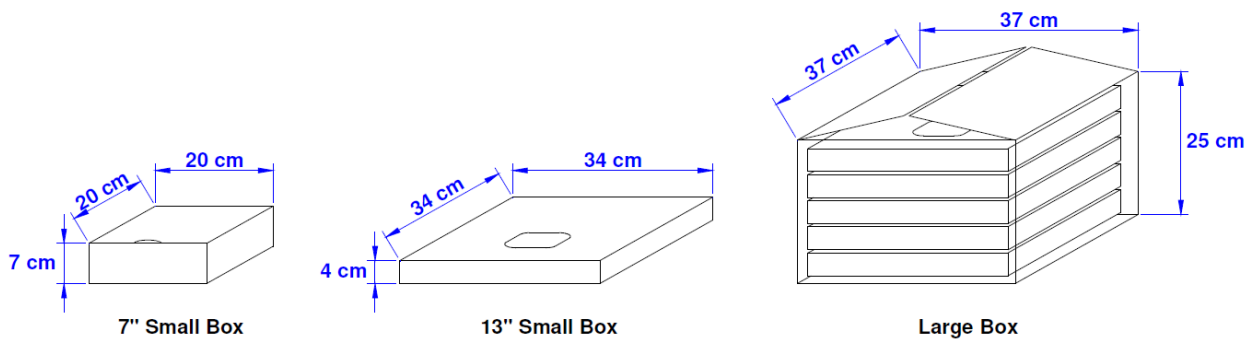

SIZE/mm	Reels in Small Box	Small Box in Large Box
04012	2	5
04012M	4	8
04015	2	5
04020	2	5
05030	1	5
06018E	1	5
06018W	1	5
06024	1	5
06030	1	5
06040	1	5
10040	1	5
10050	1	5
12050	1	5
12065	1	5



IMPORTANT NOTICE

AiT Semiconductor Inc. (AiT) reserves the right to make changes to any its product, specifications, to discontinue any integrated circuit product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

AiT Semiconductor Inc.'s integrated circuit products are not designed, intended, authorized, or warranted to be suitable for use in life support applications, devices or systems or other critical applications. Use of AiT products in such applications is understood to be fully at the risk of the customer. As used herein may involve potential risks of death, personal injury, or severe property, or environmental damage. In order to minimize risks associated with the customer's applications, the customer should provide adequate design and operating safeguards.

AiT Semiconductor Inc. assumes to no liability to customer product design or application support. AiT warrants the performance of its products of the specifications applicable at the time of sale.